


TECHNICAL SPECIFICATION:

- powered by Shuttle M
- connect to port 1 of the Forest Shuttle M
- working temperature -10°C - +50°C
- controlled by Forest Remote controls and Forest Wall Switch RF



control led program button




Do not mount within 1 meter from other equipment and receivers.
This will interfere with the receiver.

PROGRAMMING WALL SWITCH TO CLICK-ON RECEIVER:



press program button,
led will light up

hold the wall switch within 2 meter
from receiver. Select channel
and press OPEN button

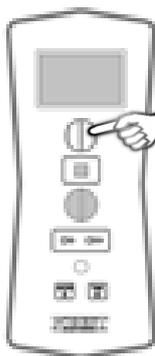

1x OPEN


on receiver:
led blinks 3 times and will go off

REMOVE PROGRAMMED CHANNEL:



press program button,
led will light up

select (to be cancelled) channel
and press CLOSE button

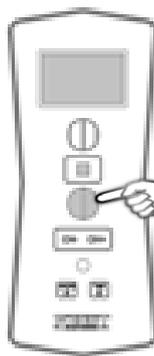

1x CLOSE

on receiver:
led will blink once and will go off

DELETE ALL PREVIOUS PROGRAMMED CHANNELS:



press and hold the program
button for 10 seconds until
control led starts blinking