



FOREST SHUTTLE® & FMS® Series

The Forest Shuttle® curtain motor and the Forest Motorised curtain track System (FMS®) make an unbeatable combination when it comes to a troublefree operated electric curtains.

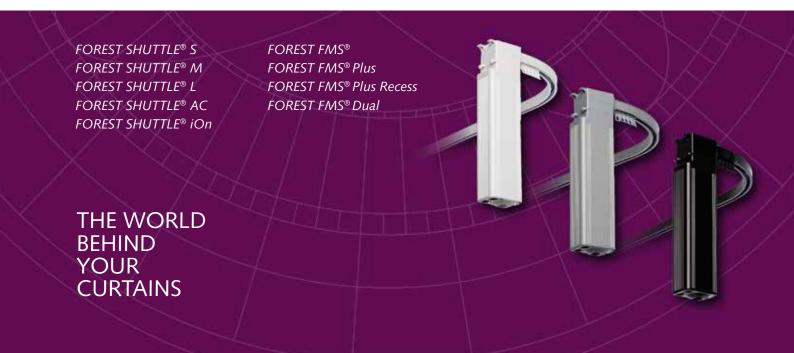

FOREST SHUTTLE® Series

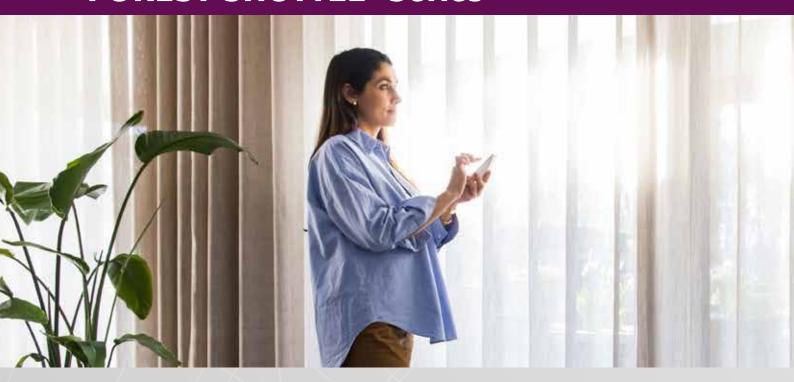

When it comes to comfort, the Forest Shuttle® lives up to its expectations. Being able to open and close your curtains remotely, from the comfort of your chair, when you are on holiday, automatically at pre-programmed opening and closing times or even linked to variable sunrise and sunset times. The Forest Shuttle® is the silent force behind the opening and closing of curtains all over the world.

The Shuttle® can be fully integrated in all major home automation systems.

For maximum safety, integrated emergency control ensures manual operation of the drapery in case of power failure.

The smooth and silent running curtain track system can, in addition to remote operation, also be operated by hand. Thanks to Touch Control technology, a gentle pull on the curtain is enough to activate the motor.

COLOUR OPTIONS SHUTTLE®









White

Grey

ey Anthracite

Black

PRODUCT INFORMATION

The Forest Shuttle® family of motors offer the following functions:

- High quality, extremely reliable and ultra silent motor.
- Integrated RF multi receiver, for Diamond Sense Remote control or wall switch.
- Various control options: App control, Remote Control (RF), Wall Switch Domotics, Building/Hotel Automation, Serial Communication, Z-Wave etc.
- Full automatic setting of the limits.
- Programming of intermediate positions possible.
- Touch Control Technology, gently pulling the curtain by hand will activate the motor. Sensitivity adjustable (except for the Shuttle® AC).
- Integrated Emergency Control with automatic declutch in case of power failure, to ensure a manual operation of the curtains.
- Stack-back position programmable to every desired setting;
- Can be used in combination with various motorised track systems like FMS System (standard option), FMS Dual Channel system, Motorised Design System (DS-XL LED) and Motorised Rod System (MRS).
- Can be mounted on the left or the right side of the track.
- Can be used with curved Forest motorised track systems.
- Integrated Z-Wave Plus as option (only Shuttle® S/M/L).
- For Skylight System (FSS®) a special Shuttle® M motor with receiver and fixed drive is available.
- Tandem motor application possible as well.
- Upside down inverted motor mounting available.
- Variable velocity with slow start and slow stop.
- Warranty: 10 years on motor (2 years on battery pack iOn)



DECORATIVE TRACK OPTIONS

The whole range of Forest motors' are totally compatible throughout our electrically operated curtain track range including the decorative options like the DS-XL® LED motorised system and the Motorised Rod System (MRS®).









MRS® MOTORISED ROD TRACK

SMART HOME DEMO SUITCASE

We have redesigned our demo case for motorised systems. Besides samples of our standard motorised curtain track system, FMS®, and the FMS® Plus with recess profile, you will also find the new two-channel system, FMS® Dual, and our motorised rod system, MRS®. Easily demonstrate app operation thanks to the included WiFi dongle and the Wireless Connector. All other operating modes, accessories and documentation are of course included.



FOREST SHUTTLE® SERIES

The Forest Shuttle® is offered in 5 versions. Choose which Forest Shuttle motor best suits your application integration needs:



14.8 Volt

FOREST SHUTTLE® iOn



Our bestselling Forest Shuttle® system is also available in a wireless, battery powered version. The Shuttle® iOn is perfect for areas without nearby power points.

An extensive period of research, development and endurance testing on countless of track set-ups has resulted in the Forest Shuttle® iOn. The Shuttle® iOn's motor is fitted with an internal, removable heavy duty battery pack. Depending on the track size and curtain weight, the battery only needs to be charged 2 to 3 times per year.

You can expect the same unique functionalities as that of the wired Shuttle® L, like Touch Control technology. The motor has an integrated Multi RF receiver, allowing for operation using any Forest remote control option.

Unique in the market

The Shuttle® iOn can be used in combination with curved tracks (max. 2 bends), which is unique in the market. It fits all Forest motorised track systems, like the FMS® system, FMS® Plus recess system, MRS® motorised rod system and also the DS®-XL motorised design system.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms or anywhere a wireless motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Li-ion rechargeable battery pack;
- Suitable for curtains up to 25 kg and 8 meter track length (straight track);
- Suitable for bent/curved curtain tracks with up to 2 bends in, for example, bay windows;
- A single full charge will last up to 6 months;
- Available colours: white, black.



FOREST SHUTTLE® Control Options

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. When controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customised room scenes that allow your curtains to operate on their own throughout the day.



FOREST DIAMOND SENSE REMOTE

15 or 2 Channel Remote control. Control up to 15 systems individually and in group by integrated timer function or manual. Auto-On mode, when holding hand above it, the integrated LED light will automatically come on. Radio control, range up to 30 meters. Including magnetic wall support.



FOREST WI-FI DONGLE

With the Shuttle® Wi-Fi dongle, you can control your motorised curtains on your mobile device via the Forest Connect app or even by voice command with the easy integration in for example Google Home, Amazon Echo or Apple Siri without the need for an additional hub or gateway.



FOREST WIRELESS CONNECTOR

The Forest Wireless Connector is an easy way to make the motorised curtain systems 'smart'. This wireless remote solution works in combination with an timer or smart plug with services such as Apple HomeKit or Google Assistant or Amazon Alexa become available. With the Forest Smart Plug it is possible to control by the Forest Connect app. The Wireless Connector is also easily incorporated into most popular building managent systems, including dry contact controls.



BUILDING AUTOMATION / HOTEL CONTROL

The Forest Shuttle® can be connected to any Building Automation system, by relay control.

SMART DEVICE CONNECTIVITY



Configure the right motorised curtain track system in a few steps.

| 国際影響 統 | | | | | | | | | Voice ontro | |
|---|---------------|---------------------------|-------------|------------|--------------------|-------------|---------------|--------------|------------------|------------|
| | Shuttle S/M/L | Shuttle S/M/L with Z-Wave | Shuttle iOn | Shuttle AC | Forest Connect app | Google Home | Apple Homekit | Amazon Alexa | Google Assistant | Apple Siri |
| Forest Wireless Connector One way transmitter to control curtains by third party apps or by Domotics. (433Mhz) | • | | • | | •1 | •1 | •2 | •1 | •1 | •1 |
| Forest Wi-Fi Dongle in combination with Forest Connect app | • | • | | | • | • | | • | • | • |
| Smartwares Controller in combination with HomeWizard lite app (433 Mhz) | • | | • | | | | | • | | |
| Homey in combination with Homey app | • | • | • | | | • | • | • | • | • |
| FIBARO System in combination with FIBARO Home Center app | | • | | •3 | | • | • | • | • | • |
| Samsung SmartThings Hub in combination with Samsung SmartThings app | | • | | | | • | • | • | • | • |
| 230 Volt hard-wired building management system | •4 | | | • | | | | | | |
| In combination with Forest sma | rt plug | | | | | | | | | |

- 2) In combination with Apple Homekit smart plug
 3) Only with FIBARO Roller Shutter 3 / Walli Roller Shutter
- 4) In combination with an AC Control Set

FOREST SHUTTLE® WORKS WITH







@CRESTRON.

Control G





Forest Shuttle® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

^{*} Only works with an actor.

FOREST SHUTTLE® Technical information



| V | 1 | |
|---|---|--|
| | 5 | |
| F | - | |
| _ | j | |
| į | J | |
| • | _ | |
| y | 1 | |

Voltage Shuttle RF Multi Receiver Power Supply Max. power Torque: Speed: Noise Level: Max. curtain weight (without curves) Dimensions Motor: Net. Weight Motor Dimensions Power Supply Protection degree Max. running time Colour options Certification & Marking:

| | Touch Control technology |
|----------|-------------------------------|
| N N | Integrated Emergency control |
| ~ | RF Communication Standard |
| EATUR | Z-Wave communication |
| ₹ | Automation System compatible |
| <u> </u> | Wi-Fi compatible |
| | Works with DS-XL LED Dimmer |
| | Works with Wireless Connector |
| | Can be used with curved track |
| | Plug & Play |
| | Warranty |

| Internal |
|----------------------------|
| External, 100 - 240V AC - |
| 0,8A - 50 - 60Hz; |
| Output 24V DC - 2,5A |
| 40W |
| 1.0 Nm |
| 14-17cm/s |
| < 40 dB(A) |
| 40 kg |
| 7 x 5 x 20 cm |
| 700 gr. |
| 50 x 80 x 30 mm |
| IP20 |
| 240 sec (in one direction) |
| White / Anthracite / Black |
| CE/FCC |
| |
| V |
| \checkmark |
| V |
| \checkmark |

10 Years

10 Years

24V DC

| SHUTTLE® M | SHUTTLE® L |
|-----------------------------------|-----------------------------------|
| | |
| 24V DC | 100 - 240V~ 50 - 60Hz 0.8A |
| Internal, optional | Internal |
| External, 100-240V AC - | Internal |
| 1,5A - 50-60Hz; | |
| Output 24V DC - 2,7A | |
| 65W | 40W |
| 1.5 Nm | 1.0 Nm |
| 14-17 cm/s | 14-17cm/s |
| < 40 dB(A) | < 40 dB(A) |
| 70 kg | 40 kg |
| 7 x 5 x 25 cm | 7 x 5 x 28 cm |
| 930 gr. | 930 gr. |
| 50 x 110 x 30 mm | - |
| IP20 | IP20 |
| 240 sec (in one direction) | 240 sec (in one direction) |
| White / Grey / Anthracite / Black | White / Anthracite / Grey / Black |
| CE/FCC | CE/FCC |
| | |
| \checkmark | \checkmark |
| , | , |

√ (additional adaptor needed)

10 Years



SPECIFICATIONS

| Voltage Shuttle | |
|-------------------|--|
| RF Multi Receiver | |
| Power Supply | |
| | |
| | |

| Max. power | |
|--------------------------------------|---|
| Torque: | |
| Speed: | |
| Noise Level: | |
| Max. curtain weight (without curves) |) |
| Dimensions Motor: | |
| Net. Weight Motor | |
| Dimensions Power Supply | |
| Protection degree | |
| Max. running time | |
| 6.1 | |

| vet. Weight Motor | 200 gi. |
|-------------------------------|----------------------------|
| Dimensions Power Supply | - |
| Protection degree | IP20 |
| Max. running time | 240 sec (in one direction) |
| Colour options | White |
| Certification & Marking: | CE |
| | |
| Touch Control technology | - |
| ntegrated Emergency control | \checkmark |
| RF Communication Standard | √ |
| Z-Wave communication | - / / |
| Automation System compatible | √ |
| Ni-Fi compatible | - // / |
| Norks with DS-XL LED Dimmer | - |
| Works with Wireless Connector | (- / |
| Can be used with curved track | √ / |
| Plug & Play | /- |
| Varranty | 10 Years |
| | |

| 100 - 240V~ 50 - 60Hz 0.8A | 14.8V DC |
|----------------------------|---|
| nternal | Internal |
| Home Automation 230V | Charger Input 100 - 240~, 50-60Hz, 2.0A Charger Output 16,8Vdc 1000mA Removeable Battery Pack |
| 40W | 30W |
| 1.0 Nm | 1.0 Nm |
| 14-17cm/s | 14-17cm/s |
| < 41 dB(A) | <40 dB(A) |
| 10 kg | 25 kg |
| 7 x 5 x 28 cm | 7 x 5 x 32,5 cm |
| 980 gr. | 1160 gr. |
| | - |
| P20 | IP20 |
| 240 sec (in one direction) | 150 sec (in one direction) |
| Vhite | White / Black |
| CE | CE |
| | |
| | \checkmark |
| | \checkmark |
| | |

 $\sqrt{}$ (additional adaptor needed)

10 Years on motor, 2 years on battery pack

FOREST MOTORISED TRACK SYSTEM - FMS®



The Forest Shuttle® and the Forest motorised curtain track system (FMS®) make an unbeatable combination when it comes to noiseless operated curtains.

The FMS® System is an elegant system for all types of medium and heavyweight draperies. Available in one piece length of 7 metres. Can be extended up to 14 metres. Available in 5 colours: white, matt white, black, matt black or grey, making it suitable to fit in every design.

FMS® PLUS AND RECESS FIXATION

Instead of a regular ceiling fix or wall fix installation of the FMS® track system, we also offer a solution for a recess fixed motorised curtain track. The FMS® Plus system is ideal for a clean, concealed curtain track installation. The FMS® Plus track and recessed profile are installed after the ceiling has been plastered and finalised. Because the recess profile is coated, the stucco does not adhere to the profile, which can cause cracks. Therefore, we strongly recommend installing the recess profile over the stucco. The motor can be placed in a regular position, or upside down into the ceiling. The system can be fitted with the regular FMS® carriers, rotating carriers or the Forest Wave System for wave pleat.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms, business meeting rooms, conference centers or anywhere a silent motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Compact and noiseless operated motorised track system.
- All Shuttle® motors can be used on the FMS® System.
- Available in white, matt white, grey, black and matt black.
- Components in matching colours.
- Clickable off-set carriers for a straight heading of the curtain; roller bearing carriers and Easyflex carriers also available.
- Especially designed for use in combination with Forest Wave System.
- Motor can be mounted on the left or the right of the track.
- One-way draw or center (split) draw curtains possible.
- All KS[®] bracket compatible.
- Ceiling brackets and wall brackets available.
- FMS® track can be made in lengths of up to 14 meter.
- FMS® track can be curved / bent.
- Recess fixation possible by recess profile in combination with FMS® Plus track.
- Warranty: 10 years.

FMS® DUAL NEW!

The FMS® Dual System is the new standard for the hotel industry when it comes to motorised curtain tracks. The FMS Dual is a unique motorised two channel curtain track system. Only one Shuttle motor is required to operate two channels. This system is designed to create an overlap that prevents light from entering the room. Thanks to the two channels, it is possible to adjust the overlap to any position. Ideal for hotels where guests arrive during the day after a long journey and want to rest first. The FMS® Dual ensures that the hotel room is completely darkened and no

disturbing rays of light enter the room. The Dual system is easy to mount on the ceiling thanks to pre-drilled holes and additional carriers can easily be added later after the track has been fixed to the ceiling. In addition to single/double pleated curtains, the wave pleat can be applied via our FES® system.

BENDING / CURVING

The FMS® track and FMS® Plus track (except recess profile) can be bent and reversed bent with a radius of 20 cm (8"). Continuous curving can be bent and reverse bent with the Electric Powered Bender.



PROFILE

FMS® Track

- Weight 303 gr/mtr.
- Size 20 x 20 mm
- Aluminium extrusion
- Colours available: white, matt white, grey, black & matt black

FMS® Plus Track

- Weight 500 gr/mtr.
- Size 19,6 x 30 mm
- Aluminium extrusion
- Colours available: white, black & matt black

FMS® Plus Recess Profile

- Weight 555 gr/mtr.
- Size 26 x 32,20 mm
- Aluminium extrusion
- Colours available: white & matt black

FMS® Dual

- Weight 1,11 kg/mtr.
- Size 72 x 24 mm
- Aluminium extrusion
- Colour available: white & matt black

FOREST FMS® TRACKS

The FMS® track system is in four versions available:







RECESS PROFILE WITH FMS® **PLUS TRACK**













G = Gloss

M = Matt

- 1 Shuttle® Motor
- (2) Motor Pulley
- (3) FMS® Track
- (4) FMS® Return Pulley
- (5) FMS® Glider
- (6) FMS® Master Carrier Underlap
- (7) FMS® Master Carrier Overlap
- (8) Stiffener Small





| FMS | FMS PLUS | FMS DUAL | MOTOR & CONTROL OPTIONS | ARTICLE | PACKING UNIT | | | ART.NR |
|-----|----------|----------|-------------------------------|--|-----------------|--|---|--|
| • | • | • | | SHUTTLE L Motor with internal RF Receiver, Touch Control and Emergency Control. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 28 cm Up to 45 kg curtain weight | 1/box | 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V | white int. multi receiver white int. Z-Wave receiver white int. Z-Wave rec. ANZ white int. Z-Wave rec. India grey int. multi receiver anthracite int. multi receiver anthracite int. Z-Wave rec. EU black int. multi receiver black int. Z-Wave receiver EU | 5232000001 5232000002 5232000007 5232000069 5232003001 5232005001 5232005002 5232006001 5232006002 |
| • | • | • | | POWER CABLE FOR SHUTTLE L & S | 1/box | EU 1.00 mtr EU 4.00 mtr UK 4.00 mtr USA 2.00 mtr AUS 1.80 mtr EU 4.00 mtr | white white white white white white black | 5201001101 5201001104 5201001134 5201001121 5201001141 5201006104 |
| • | • | • | | SHUTTLE M Strongest motor with internal RF Receiver, Touch Control System and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions $7 \times 5 \times 25$ cm Up to 75 kg curtain weight | 1/box | 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC | white int. multi receiver white int. Z-Wave receiver EU white int. Z-Wave US/908Mhz grey int. multi reciever anthracite int. multi receiver black int. multi receiver black int. Z-Wave receiver EU | 5232000003 5232000004 5232000006 5232003003 5232005003 5232006003 5232006004 |
| | | | | SHUTTLE M FOR SKYLIGHT SYSTEM (FSS) Motor with fixed drive | 1/box | 24 Volt DC | white int. multi receiver | 7131000000 |
| • | • | • | | ADAPTOR SET SHUTTLE M Incl. cable and holder | 1/box | EU 0.50 mtr EU 3.00 mtr UK 0.50 mtr USA 0.50 mtr EU 0.50 mtr | white white white white black | 5201002002 5201002003 5201002004 5201002007 5201006002 |
| • | • | • | | SHUTTLE S Motor with internal RF Receiver, Touch Control and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 40 kg curtain weight | 1/box | 24 Volt DC | white int. multi receiver white int. Z-Wave receiver EU anthracite int. multi receiver anthracite Z-Wave receiver EU black int. multi receiver black int. Z-Wave receiver EU | 5232000000 5232000010 5232005000 5232005010 5232006000 5232006010 |
| • | • | • | | ADAPTOR SET SHUTTLE S Incl. holder / excl. cable | 1/box | 24 Volt | white | 5232003002 |
| • | • | • | | SHUTTLE AC Motor with internal RF Receiverl and Emergency Control. Only for Building Management System. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 28 cm Up to 40 kg curtain weight | 1/box | 100-240V | white | 5233000000 |
| • | • | • | | SHUTTLE ION Incl. Battery Pack (14.4 V DC) Dimensions 7 x 5 x 32,5 cm Up to 25 kg curtain weight | 1/box | Accu Pack | white black | 5234000000 5234006000 |
| • | • | • | | SHUTTLE ION BATTERY PACK 4-Cell Lithium iOn Capacity 3400mAh | 1/box | | white black | 5234000001 5234006001 |
| • | • | • | | SHUTTLE ION CHARGER CABLE 1.20 mtr cable | 1/box | EU UK USA AUS | black black black black | 5234000002 523400003 5234000004 5234000005 |
| • | • | • | | DC EXTENSION CABLE FOR 24V ADAPTOR For use with Shuttle S/M adaptor and dimmer DS-XL LED | 1/box | 2 mtr | white | 5209002200 |
| | | | | AC CONTROL SET Use the AC Control in combination with the Shuttle Motor for Live AC (Domotics) AC Control set complete | 1/box | 220 Volt | white grey | 5201002202 5201003202 |
| | | | | Secondary unit-potential free relay | | 200V-240V | black white grey | 5201006202 5201002200 5201003200 |
| | | | | Secondary unit-potential free relay | | 100V-120V | black white US | 5201006200 5201002203 |

| FMS | FMS PLUS | FMS DUAL | MOTOR & CONTROL OPTIONS & ACCESSORIES | ARTICLE | PACKING UNIT | | | ART.NR |
|-----|----------|----------|--|--|---------------------------------------|--|----------------------|--|
| • | • | • | | FOREST DIAMOND SENSE REMOTE CONTROL | 1/box | Works with all Shuttle motors | white black | 5201091470 5201096470 |
| • | • | • | ** | FOREST WIRELESS CONNECTOR Incl. 15 cm USB cable / excl USB charger One way transmitter to control curtains by third party Apps* (i.e. Google / Apple / Amazon) or by Domotics. *always in combination with Forest smart plug or third party plug | 1/box | Works with all Shuttle motors | white | 5201002270 |
| • | • | • | | FOREST WIRELESS CONNECTOR USB PLUG Use in combination with Forest Wireless Connector | 1/box | | EU UK AU US | 5201002271-EU 5201002272-UK 5201002273-AU 5201002274-US |
| • | • | • | | FOREST SMART PLUG WHITE The Forest Smart Plug allows App control via the Forest Connect App (the Forest Wireless Connector is required) | 1/box | Works with all Shuttle motors | EU UK AU US | 5201001952 5201001953 5201001954 5201001955 |
| • | • | • | | FOREST WIFI DONGLE Incl. cable WiFi 2.4GHz Power supply 12V DC 300mA max USB power 5V DC 1000mA max Control the curtains by Forest Connect App Easy integration third party apps by Google / Amazon Bi-directional | 1/box | Works with all Shuttle motors except AC and iOn | white black | 5201002280 5201006280 |
| • | • | • | 0 | FOREST SHUTTLE TWILIGHT SENSOR (KAKU) | 1/box | Works with all Shuttle motors (besides Shuttle iOn) | white | 5201001951 |
| • | • | • | | FOREST WIRELESS WALL SWITCH 2-channel wall switch Dimensions: 8.5 x 8.5 x 1 cm | 1/box | Works with all Shuttle motors | white black | 5201001480 5201006480 |
| • | • | • | | FOREST PULSE WALL SWITCH Can operate one motor only Dimensions: 6.5 x 5.5 x 2.7cm (2.56 x 2.17 x 1.06") | 1/box | | white | 5201001900 |
| • | • | • | | SHUTTLE CLICK-ON RF MULTI RECEIVER For use with Forest remote in Z-Wave and building autmotion environments | 1/box | | white black | 5201001362 5201006362 |
| • | • | | The state of the s | FOREST SHUTTLE DEMO FLIGHTCASE METAL Including: Shuttle L with FMS complete, FMS Plus Recess complete, FMS Dual Complete Samples: curved FMS, FMS (White, Grey and Black), MRS, DS-XL motorised, DS-XL LED Motorised, Remote Diamond Sense (White), Wireless Wall Switch (White), WiFi Dongle, Wireless Connector, Forest Smart Plug | Piece | | | 9903000000 |
| • | • | • | | VELCRO HOTEL PROFILE Inside frame fix, to reduce light leakage in combination with looptape LOOPTAPE | 120 mtr/ bundle 25 mtr/ roll | | | 3581601600 3816202020 |

| FMS | FMS PLUS | FMS DUAL | FMS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|----------|---|--|--------------|---|--|
| • | | | | FMS TRACK 5.80 mtr (19') 7.00 mtr (23') | 10/bundle | white white matt white grey black matt black | 5101001580 5101001700 5101007700 5101003700 5101006700 5101008700 |
| • | | | | FMS CARRIER Klickable, offset, made of UV-resistant plastic. 10 Carriers on a breakaway strip, can be clicked into the the track after installation. | 250/box | white grey black | 2510101000 2510103000 2510106000 |
| | • | | | ECONOMY SLIDE Can turn in the track | 500/box | white black | 2510601000 2510606000 |
| • | | | | FMS MASTER CARRIER SHORT R/L WHITE For use with single pleat or pinch pleat curtains For use with one way draw curtains To use in combination with Wave Return Pulley | 25/box | white black | 5215801001 5215806001 |
| • | | | Marie September 1 | FMS MASTER CARRIER UNDERLAP CLICK ON Reversible Usable for Click on stiffner | 15/box | white matt white grey black matt black | 5215801010 5215801010-M 5215803010 5215806010 5215806010-M |
| • | | | 50000 | FMS MASTER CARRIER OVERLAP CLICK ON Reversible Usable for Click on stiffner | 15/box | white matt white grey black matt black | 5215901010 5215901010-M 5215903010 5215906010 5215906010-M |
| • | | | (<u> </u> | FMS MASTER CARRIER UNDERLAP SINGLE LONG R/L Reversible For single draw curtains | 15/box | white black matt black | 3016001000 3016006000 3016006000-M |
| • | | | (2) | PROLONGED OVERLAP CLICK ON 150 mm long 200 mm long | 15/box | white matt white black matt black | 9500001010 9500001010-M 9500006010 9500006010-M |
| • | | | | Z-SHAPED OVERLAP ARM Reversible Z-shaped overlap arm. Fits FMS master carriers. For further reducing of light leakage for center closing. | 15/box | white white | 9500001020 9500001030 |
| • | | | | STIFFENER CLICK-ON Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain | 15/box | | 5116001001 |
| • | | | tananananananananananananananananananan | FMS TRANSPORT BELT Toothed belt, to be installed inside the FMS Track | 100mtr/roll | | 5105501000 |
| • | | | | FMS CONNECTOR To fix the FMS Master Carrier onto the FMS transport belt | 50/box | white grey black | 5103011500 5103013500 5103016500 |
| • | | | | FMS MOTOR PULLEY Connects motor with FMS Track | 1/box | white grey black | 5103011000 5103013000 5103016000 |
| | | | | FMS MOTOR PULLEY UPSIDE DOWN | 1/box | white | 5103011003 |
| • | | | | FMS ANGLE PULLEY 45 degrees adjustable Only for up to 7kg curtain weight (Shuttle M) | 1/box | white | 5103011010 |
| • | | | | FMS RETURN PULLEY Reverses the FMS transport belt in the FMS track For center draw curtains | 1/box | white grey black | 5103011100 5103013100 5103016100 |
| • | | | | FMS TRACK JOINER Used to make a solid connection between two pieces of track | 10/box | white matt white grey black matt black | 2518401000-A 2518401000-A-M 2518403000 2518406000 2518406000-A-M |

| | Sr | ΑΓ | WAVE | | | | | |
|-----|----------|----------|-------------------------------|--|----------|--------------|---------------------------------|--|
| FMS | FMS PLUS | FMS DUAL | WAVE COMPONENTS FOR FMS | ARTICLE | | PACKING UNIT | | ART.NR |
| • | | | and and a second | WAVE ADJUSTABLE MASTER CARRIER UNDERLAP For use with wave pleat curtains (Easyflex) See additional components below | w | 25/box | white black | 4813001050 4813006050 |
| • | | | | WAVE BELT CONNECTOR CENTER DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier | w | 50/box | white black | 4813001040 4813006040 |
| • | | | | WAVE BELT CONNECTOR ONE-WAY DRAW For use with wave pleat curtains (Easyflex) To use in combination with adjustable wave carrier | w | 50/box | white black | 4813001030 4813006030 |
| • | | | | WAVE RETURN PULLEY MOTORISED For use with wave pleat, single or pinch pleat curtains For wave pleat curtains use in combination with adjustable wave carrier (Easyflex) For single/pinch pleat curtains use in combination with FMS Master carrier short R/L White | ശ | 25/box | white black | 4813001060 4813006060 |
| • | | | | WAVE DS-XL END STOP To use in combination with adjustable wave carrier Easyflex For center draw curtains | ശ | 100/box | | 3916001000 |
| • | | | | FMS RETURN PULLEY EASYFLEX For use with wave pleat curtains (Easyflex) For single draw curtains | ശ | 1/box | white grey black | 5103011102 5103013102 5103016102 |
| • | | | | WAVE ADJUSTABLE HOOK MOTOR For use with wave pleat curtains (Easyflex) | w | 25/box | white black | 4813001010 4813006010 |
| • | | | | WAVE ADJUSTABLE HOOK RETURN PULLEY For use with wave pleat curtains (Easyflex) | w | 25/box | white black | 4813001020 4813006020 |
| • | | | | EASYFLEX MASTER CARRIER LEFT For use with wave pleat curtains (Easyflex) For center draw | ເນເນ | 25/box | white grey black | 4815351090 4815353090 4815356090 |
| • | | | | 90 degrees left for small stiffener EASYFLEX MASTER CARRIER RIGHT For use with wave pleat curtains (Easyflex) Center draw | ໜ | 25/box | white white grey black | 4815361090 4815451090 4815453090 4815456090 |
| • | | | | 90 degrees right for small stiffener EASYSNAP MASTER CARRIER LEFT For use with wave pleat curtains (Easysnap) 90 degrees | w ooo | 15/box | white | 4815301090 4815301090 |
| • | | | | EASYSNAP MASTER CARRIER RIGHT For use with wave pleat curtains (Easysnap) 90 degrees | w | 15/box | white | 4815401090 |
| • | | | | EASYSNAP FMS MASTER CARRIER For use with wave pleat curtains (Easysnap) | സ | 15/box | white | 4815401000 |
| • | | | 0 20 10 | EASYSNAP FMS UNDERLAP L/R For use with wave pleat curtains (Easysnap) | ശ | 15/box | white | 4815401000 |
| • | | | | WAVE STIFFENER CLICK ON 'SMALL' For use with wave pleat curtains (Easyflex/Easysnap) Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain | w | 15/box | white | 4815001001 |



| S | FMS PLUS | FMS DUAL | FMS PLUS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|----------|--------------------------------|--|--------------|---------------------|------------------------------|
| FMS | FM | FM | | FMS PLUS TRACK | 10/bundle | white | 5131001700 |
| | • | | | 7.00 mtr (23') | | black | 5131006700 |
| | | | | 5,80 mtr (19') | 10/bundle | matt black | 5131006580-MAT |
| | | | | FMS PLUS RECESS PROFILE 7.00 mtr (23') | 1/piece | white matt black | 5131011100 5131016700-MAT |
| | | | | | | | |
| | | | | FMS PLUS RECESS PROFILE FIXING STRIP 7.00 mtr (23') length | 1 piece | white black | 5131001600 5131006600 |
| | | | | - | | | |
| | | | | FMS PLUS RECESS FIXING WEDGE To fix the track into the recess profile | 10/box | white black | 5131001100 5131006100 |
| | | | | | | | |
| | | | | FMS-PLUS RECESS OUTER BEND 90 DEGREES Preformed 90-degree bend for FMS PLUS recess | 1/piece | white matt black | 5131001790 5131006790 |
| | • | | | profile | | | |
| | | | | EMC DI LIC DECECC INVEST DEND OF THE CO. | Alvier | | F424044700 |
| | | | | FMS-PLUS RECESS INNER BEND 90 DEGREES Preformed 90-degree bend for FMS PLUS recess profile | 1/piece | white matt black | 5131011790 5131016790 |
| | | | | | | | |
| | | | | ECONOMY CARRIER Can turn in the track | 100/box | white black | 2510601000 2510606000 |
| | • | | | can tarn in the track | | DIACK | 251000000 |
| | | | | FMS PLUS TRANSPORT BELT Toothed belt to be installed inside FMS Plus track | 100mtr/roll | | 5135501001 |
| | • | | | 9.3 x 2.2mm Material: KEVLAR | | | |
| | | | | FMS PLUS MOTOR PULLEY Reverse the FMS PLUS belt in the FMS PLUS track | 5/box | white black | 5133011000 5133016000 |
| | • | | | NOTO SE CHIC TIMO TECOS DELL'III CHIC TIMO FECOS CIACK | | DIACK | 5155010000 |
| | | | | | | | |
| | | | | FMS PLUS RETURN PULLEY Reverse the FMS PLUS belt in the FMS PLUS track | 5/box | white black | 5133011100 5133016100 |
| | | | | | | | |
| | | | | FMS PLUS MOTOR PULLEY UPSIDE DOWN | 1/box | white | 5133011003 |
| | • | | | Can be used to place the motor upside down (recess) | | | |
| | | | | | | | |
| | | | | FMS PLUS MASTER CARRIER UNDERLAP Arm is reversible, incl. belt connector | 10/box | white black | 5135801000 5135806000 |
| | • | | | For use with wave pleat curtains in combination with FES-system (Easyflex) | | | |
| | | | | FMS PLUS MASTER CARRIER OVERLAP | 10/box | white | 5135901000 |
| | • | | | Arm is reversible, incl. belt connector For use with wave pleat curtains in combination with FES-system (Easyflex) | | matt black | 5135906000-M |
| | | | £20 % | (SU) | | | |
| | | | | FMS PLUS MASTER CARRIER EASYFLEX L&R 90 degrees | 10/box | white | 5135901010 |
| | • | | COC | For use with wave pleat curtains in combination with FES-system (Easyflex) | 1 | | |
| | | | | 000 | | | |



| FMS | FMS PLUS | FMS DUAL | FMS PLUS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|----------|--------------------------------|--|--------------|----------------------------------|--|
| | • | | | FMS PLUS L-PULLEY To create a double overlapping track system in combination with only one motor | 1/box | white | 5133011101 |
| | • | | | FMS PLUS RECESS COVER PLATE | 1/box | white black | 5133011104 5133016104 |
| | • | | | FMS PLUS RECESS COVER PLATE UPSIDE DOWN Cover plate for recess; motor pulley | 1/box | white black | 5133011004 5133016004 |
| | • | | | CRS DECO / MRS / FMS PLUS TRACK CONNECTOR Suitable for fms plus with recess profile | 25/box | | 5815200005 |
| | • | | | FMS PLUS BRIDGE 6,5 cm 28 cm | 10/box | white black white black | 4518701000 4518706000 4518601000 4518606000 |
| | • | | | FMS PLUS TRACK CONNECTOR PIN Stainless steel, 2 x 20mm For a firm seamless connection | 50/box | | 990000012 |

| FMS | FMS PLUS | FMS DUAL | FMS DUAL TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART. NR |
|-----|----------|----------|--------------------------------|--|----------------|---------------------|------------------------------|
| | | • | | FMS DUAL Two glide track predrilled, aluminium extrusion, white powder coated, lubricated | 1 length/7 mtr | white matt black | 3851001700 3851006700-MAT |
| | | • | | FMS DUAL UPPER TRACK CONNECTOR Used to make a solid connection between two pieces of track | 10/box | aluminium | 3851000003 |
| | | • | | FMS DUAL LOWER TRACK CONNECTOR For optimal guiding of the transport belt between two pieces of track | 25/box | white black | 3851000002 3851006002 |
| | | • | | FMS DUAL MOTOR PULLEY Connects motor with track | 5/box | white black | 3851000004 3851006004 |
| | | • | | FMS DUAL RETURN PULLEY Reverses the transport belt in the track | 10/box | white black | 3851000005 3851060005 |
| | | • | | FMS DUAL ENDSTOP Plastic end stop can be used to set the overlap position | 25/box | white black | 3851000006 3851006006 |
| | | • | | FMS DUAL MASTER SET For positioning the 1st carrier | 10/box | white black | 3851000007 3851006007 |
| | | • | | FMS DUAL TRANSPORT BELT Toothed belt, to be installed inside the track | 100 mtr/roll | | 3851000001 |
| | | • | | MCS COVER CAP, 10mm. The cap covers the screw hole and ensures a stylish and ultimate finished look. | 500/box | white black | 539999999 539999996 |
| | | • | | KS ASYMMETRICAL CARRIER | 500/box | white black | 1010001000 1010006000 |
| | | • | | CONTRACT ROLLER CARRIER For a silent and smoothly operation with heavier curtains. Designed for use with butterfly pleats. | 100/box | white black | 4831001000 4831006000 |

| FMS | FMS PLUS | FMS DUAL | MOUNTING OPTIONS + OTHER ITEMS | ARTICLE | PACKING UNIT | | ART. NR |
|-----|----------|----------|--------------------------------------|---|-----------------|------------------------|---|
| • | • | | | SMART KLICK CEILING BRACKET Incl. cover cap 'Klicks' onto track, powder coated | 100/box | white grey black | 1018201001 1018203001 1018206001 |
| | | | | ALUMINIUM WALL BRACKET 7.5 cm single (3') | 20/box | white grey black | 1020301075 1020303075 1020306075 |
| | | | | ALUMINIUM WALL BRACKET 10 cm single (4') | 20/box | white grey black | 10203031100 1020303100 1020306100 |
| • | • | | | ALUMINIUM WALL BRACKET 15 cm double (6') | 15/box | white grey black | 1020301150 1020303150 1020306150 |
| | | | | ALUMINIUM WALL BRACKET 20 cm double (8') | 15/box | white grey black | 1020301200 1020303200 1020306200 |
| | | | | ALUMINIUM WALL BRACKET 25 cm triple (10') | 15/box | white grey black | 1020301250 1020303250 1020306250 |
| • | • | | É | SMART KLICK COVER CAP ALU WALL BRACKET UNIVERSAL | 50/box | white grey black | 1021301000 1021303000 1021306000 |
| • | • | | | FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty. | 100/box | | 7160001000 |

| FMS | FMS PLUS | FMS DUAL | BENDING COMPONENTS + OTHER ITEMS | ARTICLE | PACKING UNIT | | ART. NR |
|-----|----------|----------|--|---|-----------------|--------------|--------------------------|
| • | • | | | CONTRACT BENDING TOOL BASIC for FMS and FMS Plus | 1/each | | 2560000000 |
| | | | | FMS CONTRACT BENDING WHEEL radius 20 cm incl. wedges | 1/each | | 2561000000 |
| | | | | FMS PLUS CONTRACT BENDING WHEEL ALL-IN radius 20 cm incl. wedges and bending strips | 1/each | | 5131000000 |
| • | | | | FMS BENDING STRIPS 90 cm T-bending strip | 1/each | | 5160100000 |
| | • | | | FMS PLUS SET BENDING STRIPS 90 cm | 1/each | | 5131000001 |
| | | | | BENDING STAND Stand for contract bending tool | 1/each | | 2560800000 |
| • | • | | | ELECTRIC POWERED BENDER | 1/each | 230V 110V | 1060500000 1060500001 |
| • | | | | FMS BENDING WHEEL for electric bender, set of 3 FMS PLUS BENDING WHEEL for electric bender, set of 3 | 1/set | | 2560700000 |
| • | | | | FMS/CS BENDING STRIP for electric bender 700 cm | 1/each | | 5160100010 |
| | • | | | FMS PLUS BENDING STRIPS for electric bender | 1/piece | | 5160800000 |
| • | • | • | | FOREST LUBRICANT To lubricate components during assembly | 1/box | | 5109010000 |



