


FOREST ROMAN BLIND Series

Elegantly shaped aluminium profile with integrated Velcro Tape



FOREST BLIND SYSTEM - BS®

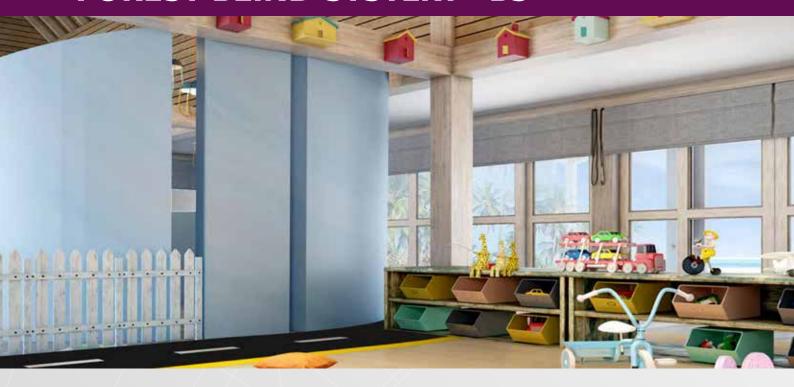

For a more streamlined look or when space is at a premium, roman blinds that stack neatly at the top of the window when retracted are the perfect solution. With the Blind System - BS® of Forest a sleek natural look is provided for your interior. Experience the simplicity of chain operation for Roman blinds. With an easy-to-use chain mechanism, adjusting the blinds to your desired position is effortless.

The Blind System - BS® is the most widely used and recognised roman blind in the industry. It comes with integrated velcro tape so that the fabric can be easily attached & removed. The system is always correctly alligned due to the twistlock on the cord roll support. For the ultimate convenience a motorised control option is possible. Operate the Blind System at the press of a button or by your smartphone. See for more info about motorised options check further down in this brochure.

PRODUCT INFORMATION


- Compact hand drawn roman blind system.
- For all types of light and medium weight draperies.
- Elegant shaped aluminium profile, with integrated Velcro hook tape.
- Application width: min. 38 cm & max 5.80 meter (19").
- Available height: 3.50 meter (11.5").
- Simple face-fix and top fix installation.
- Conic shaped drums; thus smooth and straight operation of the system is guaranteed.
- Self-braking endless chain control units.
 1:1 (fabric weight up to 3,5 kg)
 1:4 (fabric weight up to 7,5 kg)
- Total maximum fabric weight up to 7,5 kg.
- Colour available: white.
- Special Child Safety solution possible.
- Track finish: chromated powder coated.
- Warranty Manual System: 10 year.

FOR USE IN

Hotels, offices, residences, boats or anywhere an efficient Velcro track system for roman shades is required.


CONTROL OPTIONS



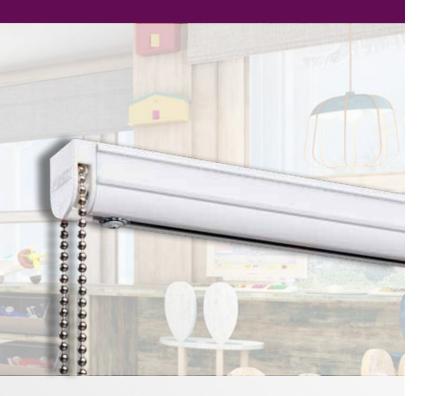

PROFILE

- Weight 409 gr/mtr
- Aluminium extrusion 6063 T5
- Size 33.3 x 36.7 mm (1.3" x 1.4")
- Colour available: white








- 3 Counterweight bar 6 x 20 mm.
- 4) BS Track incl. Velcro Hook Tape
- 5 BS Rod 5x5mm
- 6 BS Quicklock Cord Roll
- 7 BS Ceiling bracket, swivel
- 8 BS Control Unit 1:4
- 9 Chain

FOREST BLIND SYSTEM MAX - BS MAX®

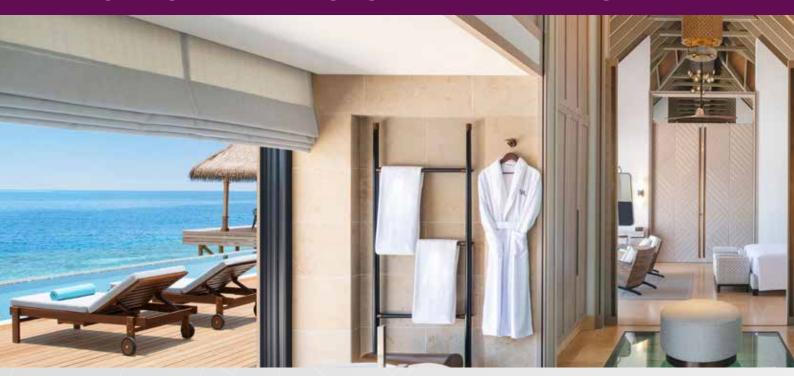

To complement the manual range of the roman blind systems for heavier duty drapery, Forest introduces the Blind System Max[®].

The Forest BS Max® is developed for taller windows and heavier fabrics. This roman blind system can go up to a height of 4.80 meter with a total weight of 13 kg. It comes with integrated velcro tape so that the fabric can be easily attached & removed.

PRODUCT INFORMATION


- Hand drawn roman blind system.
- For all types of medium and heavy weight draperies.
- Elegant shaped aluminium profile, with integrated Velcro hook tape.
- Application width: min. 38 cm & max 5.80 meter (19").
- Available height: 4.80 meter (15,75").
- Simple face-fix and top fix installation.
- Cords are easy to remove; very useful when washing or dry cleaning the fabric.
- Self-braking endless chain control units.
- Maximum fabric weight per cord roll:
 4 kg and total system 13 kg.
- · Colour available: white.
- Track finish: chromated powder coated.
- 10 year warranty

FOR USE IN

Hotels, offices, residences, boats, campers, planes or anywhere an efficient Velcro track system for roman shades is required.


CONTROL OPTION




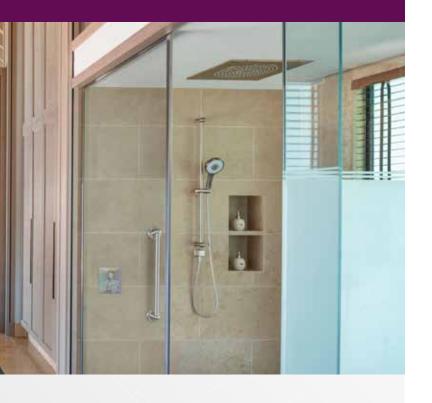

PROFILE

- Weight 694 gr/mtr
- Aluminium extrusion 6063 T5
- Size 53.2 x 53.5 mm (2.0" x 2.1")
- Colour available: white



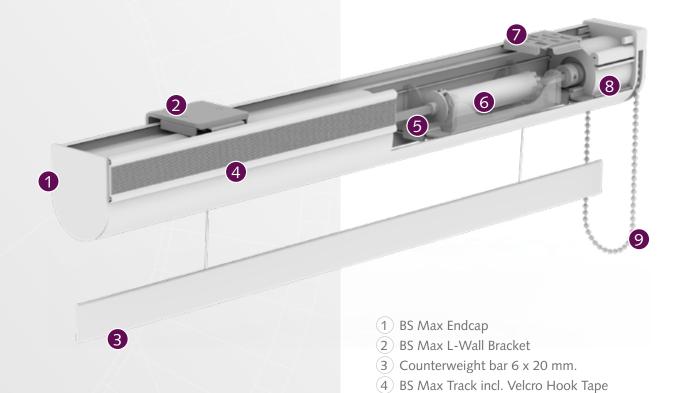

5 BS Rod 5x5mm6 BS Max Cord Drum

9 Chain

7) BS MaxHidden Ceiling Bracket8) BS Max Control Unit 1:4

FOREST BLIND CONTRACT SYSTEM - BCS®



Another solution of Forest is the motorised roman blind 'BCS®-system', developed especially for taller window frames and heavier fabrics. The tubular motor in the system is 220 Volt and available in variable voltages as required. A powerful 121 Watt motor is standard, capable of lifting blinds of up to 13 kg; other motor types - capable of up to 26 kg - are available upon request. The cord coils can hold 5.5 meter of cord.

The Forest roman blind BCS® system is suitable for all current control systems and incorporates a unique, patented cord braking system. If, for any reason, the roll down action of a blind is obstructed, the motor automatically trips out to prevent the blind leaning and the cord breaking.

PRODUCT INFORMATION

- Motorised roman blind system.
- For all types of medium and heavy weight draperies.
- Elegantly shaped aluminium profile, with Velcro Hook
 Tape
- Available width: 5.80 meter (19").
- Application width: min. 65 cm & max 5.50 meter (18").
- Simple and quick installation with Smart Klick® bracket.
- Cords are easy to remove; very useful when you want to wash or dry cleaning the fabric.
- Can be controlled by wall switch, remote control (high frequency).
- Easy to connect to building automation systems.
- Easy to connect with third party Apps (Apple Homekit or Google Assistant) by the Forest Wireless Connector.
- Cord Drums can be placed on every position in the profile.
- Maximum fabric weight per cord roll: 4 kg.
- Tubular motor also available with internal Multi receiver and electronic limit setting.
- Track finish: aluminium, chromated, powder coated.
- Warranty Manual System: 10 year.
- Warranty Motorised System: 5 year.

FOR USE IN


Domestic and/or project market, or at any location where a high quality and smooth operated motorized blind system is requested.

CONTROL OPTIONS







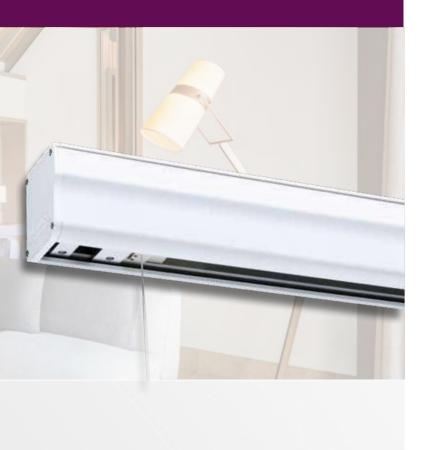


PROFILE

- Weight 1092 gr/mtr
- Aluminium extrusion 6063 TS
- Size 63 x 74 mm (2.4" x 2.9")
- Colour available: white

8 BCS Centre Support9 Forest Tubular Motor10 Ceiling Swivel Bracket

63 mm






FOREST BLIND CONTRACT SYSTEM - BCS®



SPECIFICATIONS

Туре	Strength	Speed	Weightload	Noise level	Internal Receiver	Control options
6/28/S	6 Nm	28 rpm	13 kg	< 44 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
6/20/SQ	6 Nm	20 rpm	13 kg	< 40 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
13/14/S	13 Nm	14 rpm	26 kg	< 44 dB(A)	No	Home Automation / Forest Multi Receiver Wall Switch
6/28/E	6 Nm	28 rpm	13 kg	< 44 dB(A)	Yes	Forest Remote / Wireless Wall Switch / Forest Wireless Connector
6/20/EQ	6 Nm	20 rpm	13 kg	< 40 dB(A)	Yes	Forest Remote / Wireless Wall Switch / Forest Wireless Connector
13/14/E	13 Nm	14 rpm	26 kg	< 44 dB(A)	Yes	Forest Remote / Wireless Wall Switch / Forest Wireless Connector

MOUNTING



Wall and ceiling fixing is possible

ADJUSTING MOTOR

The limit settings for the tubular motors can be done as follows:

- S motors, mechanically by means of an allen key.
- E motors, electronically by means of a Forest Remote or RF Wall Switch.





WORKS WITH

















^{*} Only works with actor.

Forest BCS® is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

CONTROL OPTIONS

Choose your preferred control option.



FOREST WIRELESS CONNECTOR

The Forest Wireless Connector provides an easy solution to make Forest motorised roman blinds 'smart.' When combined with a smart plug, you can effortlessly control the roman blinds through a mobile app. Controlling the motorised blind system by your smartphone or tablet, you can create and schedule customized room scenes that allow your blinds to operate on their own throughout the day.





Scan for more info

If you prefer to use the Forest Connect App, you can opt for Forest's smart plug. If you wish to operate your blinds with Apple HomeKit, Amazon Alexa, or Google Assistant, you will need a compatible third-party smart plug that works with these smart home apps. This RF device can also be seamlessly integrated into the most common building management systems, including systems with dry contacts.



FOREST DIAMOND SENSE REMOTE

15 Channel remote control, possibility to control up to 15 systems individually and in group by integrated timer function or manual. Auto-On mode, when holding hand above it, the integrated LED light will automatically come on. Radio control, range up to 30 meters. Including magnetic wall support.



BUILDING AUTOMATION / HOTEL CONTROL

The BCS® system can be connected to any Building Automation system, by relay control. Also possible using the Wireless Connector.

BS	BS-MAX	BCS		ARTICLE	PACKING UNIT		ART.NR
•				BS TRACK Extruded aluminium chromated white powder coated, with Velcro hook tape on front of the track. Available length: 5.8 mtr. (19 Ft.)	58 mtr./bundle	white	3601001580
				BS CONTROL UNIT 1:4, incl. endcap Heavy duty, Self-braking. Operation by chain. Weight capacity 7.5 kg	100/box	white	3611001014-L
				BS CONTROL UNIT 1:1, incl. endcap Weight capacity 3.5 kg			3611001011-L
•				CHILD SAFETY CONTROL UNIT 1.4 Manual, incl. endcap	100/box	white	3611001000
•				QUICKLOCK CORD ROLL incl. 3.5 mtr. cord (different color types cord available upon request, see for colour options BS/ BCS Cord)	100/box	white/transparent	3642401350
				without cord			3642400000
•				BS WALL BRACKET, SWIVEL Metal	100/box	white	3663001000
•				BS CEILING BRACKET, SWIVEL	100/box	white	3661000000
•			10.9	BS SMART CLICK WALL / CEILING BRACKET Metal	100/box	white	3662000000
•				BS MOTOR 24V Double shaft motor including 2 end caps and integrated-receiver.	1/box		3648000000
				FOREST ADAPTOR FOR BS MOTOR Forest adaptor with support bracket for BS motor (without cable)	1/box	white	5232003002
•				Cable with plug available in versions	1/box	EU UK AUS USA	5201001101 5201001131 5201001141 5201001121
	•			BS MAX TRACK Extruded aluminium chromated white powder coated, with Velcro hook tape on front of the track Available lenght: 5,8 mtr (19 Ft.)	46,4 mtr./ bundle	white	3710001580
	•			BS MAX CONTROL UNIT 1:4 with endcap	50/box	white	3711001014
	•			BS MAX CORD DRUM incl. 4,8 mtr. cord	50/box	white/transparent	3711000480
	•			BS MAX HIDDEN CEILING BRACKET	50/box	white	3711000000
	•		000	BS MAX L-WALL BRACKET	100/box	white	3711000001
•	•			BS ROD 5X5 MM ALUMINIUM Aluminium 5 x5 mm (0,20" x 0,20") Available length: 5,8 mtr (19 Ft.)	10/bundle		3630000580
•	•	•		FIBEROD 6 meter length 4mm diameter	600 mtr. / bundle		3535301600

	BS-MAX	S		ARTICLE	PACKING UNIT		ART.NR
BS	BS-	BCS					
		•		BCS TRACK Extruded aluminium chromated white powder coated Available Length 5,80 mtr (19 Ft.)	500 mtr./roll	white	3416101000
		•		BCS VELCRO HOOK TAPE 25 mm height. 1,20 meter length	1/box	white	3416500004
		•		BCS TUBE 8-ANGULAR Length 5,80 mtr (19 Ft.)	1рс	white	3416102000
		•		BCS ENDCAPS LEFT/RIGHT	25 sets/ box	white	3416201000
		•	o o go	BCS EASY MOUNT WALL / CEILING BRACKET For wall and ceiling fixing.	25/box	white	3416301010
		•		BCS MOUNTING BRACKET WITH ALLEN SCREW For wall and ceiling fixing.	25/box	white	3416301020-B
		•		CEILING SWIVEL BRACKET For ceiling fixing.	100/box	white	3818200450
		•		BCS CENTRE SUPPORT Dimension: 51 x 56 mm.	25/box		3416500000
		•		BCS TUBE SUPPORT 8-ANGULAR To be placed on the open end of the 8 angular tube.	25/box		3416500003
		•		BCS CORD DRUM COMPLETE Incl. 5.5 mtr white cord.	25/box		3416500002
			<u> </u>	FOREST TUBULAR MOTOR Ø 35MM 6/28/S 13/14/S	1/box	230v/50hz 6nm/28rpm 230v/50hz 13nm/14rpm	3416600012 3416600016
				FOREST SILENT TUBULAR MOTOR Ø 35MM 6/20/SQ	1/box	230v/50hz 6nm/20rpm/SQ	3416600017
		•	6	FOREST TUBULAR MOTOR Ø 35MM WITH INTERNAL RECEIVER 6/28/E 13/14/E	1/box	230v/50hz 6nm/28rpm 230v/50hz 13nm/14rpm	3416600112 3416600116
				FOREST SILENT TUBULAR MOTOR Ø 35MM WITH INTERNAL RECEIVER 6/20/EQ	1/box	230v/50hz 6nm/20 rpm/EQ	3416600117
•	•	•		COUNTER WEIGHT BAR 6 MTR		6 x 20 mm white	3501701600 3801400600 3801401600 3801402600
•	•		,	ROMAN BLIND CHAIN 6 MM PITCH METAL STAINLESS STEEL	roll 1/bag	rol 150 mtr 1.50 mtr (drop=0.75 mtr) 2.00 mtr (drop=1.00 mtr) 2.50 mtr (drop=1.25 mtr) 3.00 mtr (drop=1.50 mtr) 3.50 mtr (drop=1.75 mtr) 4.00 mtr (drop=2.00 mtr) 4.50 mtr (drop=2.25 mtr)	3670008100 3670008150 3670008200 3670008250 3670008350 3670008350 3670008400 3670008450



