






### **Product information**

- Highly efficient cord traversing system with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be curved and reverse curved by using a 10 cm (4") radius or continuous curved.
- Heavy duty clickable carriers -UV protected for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for ripplefold or accordiafold drapery systems.
- Maximum fabric weight: ± 6 kg per meter (4,5 LBS per ft.).
- Colours available: white and silver.
- Available lengths: 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"),).
- Track finish: chromated powder coated with a factory applied patented dry lubricant.
- Limited lifetime warranty.

### For use in

Hotels - offices - residences - boats - campers - planes or any location where an efficient cord traversing system is required.

## **Applications**



Bending and assembly instructions available on request


# Bending/ curving

The track can be curved and reversed curved using a 10 cm (4") radius. Countinuous curving can easily be done using the continuous curver or the electric powered bender.



### **Profile**

- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 202 grams per meter (2.17 ounce per ft.)
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").

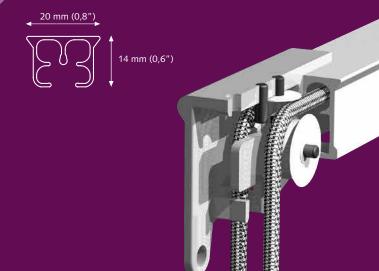





Easy installation click - position - tighten

# **Mounting Brackets**


### Ceiling Bracket

- (1) CKS Track
- (2) KS Carrier
- (3) CKS Master Carrier Overlap
- (4) CKS Master Carrier Underlap
- 5 CKS Pulley


1

### Wall bracket aluminium single A) 7,5 cm (3"), B) 6,3 cm (2,5")

A) 10 cm (4"), B) 8,8 cm (3,5")



# Wall bracket 3,5 cm (1,4"), 6 cm (2,4")



#### A) Min. 10 cm (4")



### A) Min. 15 cm (6")




#### Wall bracket aluminium double

A) 15 cm (6"), B) 9,2 cm (3,6"),C) 4,5 cm (1,8")


3

A) 20 cm (8"), B) 9,2 cm (3,6"),C) 9,5 cm (3,7")



### Wall bracket aluminium triple

25 cm (10")



Other brackets are available. Brackets need to be placed every 60 cm (24").

#### Colours available from stock:

Complete the art.nr. with the indicated colour-code

01 White 03 Silver

06 Black

Other colours can be delivered on request.



**CKS Track** 

15010....00 cm 20/bundle Aluminium extrusion, powder coated, lubricated. Colours 01, 03 & 06 Available lengths: 4 m. (13'1"), 5 m. (16'4"), 6 m. (19'8"). Silver only in 5 meter length



**KS/DS/CKS Track Joiner** 

Available in the colours: 01, 03 and 06.

1018401010 10/box

15157..000

15156..000

1530301000

1530311000

100/box

100/box

15301..000

1530101020

25/box

25/box

25/box

25/box



Carrier 10100.000 'Klickable", offset, constructed of 500/box UV resistant plastic. 10 Carriers on a break-away strip. Can be clicked in after installation. Colours: 01, 03 & 06.



**CKS Master Carrier Overlap** 

Will go through curves. Available in the colours: 01, 03 and 06.



**CKS Master Carrier Underlap** 

Will go through curves. Available in the colours:

01.03 and 06.



**CKS Cord Connector** 

Connects cord to the CKS Master Carrier. Colours: 01

**CKS Cord Connector Half** 

Connects cord to the CKS Master

Carrier. Colours: 01



CKS Pulley

Reversible, for two way draw. Available in the colours:

01, 03 and 06.



CKS Center Pulley

to join two equal sized tracks in the middle, to create lengths >

6 meter. (19' 18")



Traverse Cord

1030401000 Nylon drapery cord designed for 250 mtr/roll

strong smooth slide, Ø 3.5 mm (0,14") 16 ply. White

**CKS End Pulley White Short** 1530101011

Especially for one-way closing of 25/box

the curtain. Available in white & silver.



**Tension Pulley** 

Plastic, white.

1030501000 25/box

10/box



Cord Chain Weight Design

110 gr White

Grey Black 3030701000 3030703000 3030706000



**Smart Klick Ceiling Bracket** 

10182..000 "Klicks" onto track, powder coated. Install with counter sunk head screw 4 mm. 100/box

**Inclusive Covercap** 

1018201001 white 1018203001 silver brown 1018205001 1018206001 black



**Smart Klick Wall Bracket** 

3,5 cm ( $1^3/8$ ") and 6 cm ( $2^3/8$ ").

"Klicks" onto track, powder coated. 10202..035

One screw attachment.

10202..060 For light weight use only.



**Aluminium Wall bracket** 

Smart klick, powder coated.

10203....mm

50/box

7,5 cm single (3") 20/box 10 cm single (4") 20/box 15 cm double (6") 15/box 20 cm double (8") 15/box 25 cm triple (10") 10/box



**Smart Klick Cover Cap** Alu Wall Bracket Universal

10213..000 50/box

Colours: 01, 03.



**Compact Bending Tool** 

105000000 For 20 mm (0,8") KS/CRS 1/box

KS/CKS Bending Wheel All-in

105100000

For 20 mm (0,8") KS/CRS incl. strips 1/box



**Continuous Curver** 

1060200000 1/box

1060500000

1/box

Add on tool for the Compact Bending tool. Designed to create continuous curves and arches in any radius. Includes bending strip. For CKS/KS track only.



**Electric Powered Bender** 

Available in 230V or 115V, to create continuous curves and arches. Minimum radius 50 cm

(20")

**CKS Replacement Bending Strip** 

For Compact Bending Tool. Length of strip: 60 cm (23")

For Continues Curver / electric

1560300000

1560100000

1/each

1/each

1/each

bender. Length of strip: 7 mtr. (23")

KS/CKS Bending Wheels For electric powered bender.

1060700000 1/set



**Electric Powered Railcutter** 

Complete set of 3 wheels.

For CKS/KS track only.

230 Volt FU 115 Volt USA

1061100000 1061200001 230 Volt UK 1061200002

Replacement blade For electric powered railcutter. 1061200000 1/each

Distributor:







