






### **Product information**

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty klickable carriers 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white, silver.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').

## **Profile**


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



### For use in

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.


## **Applications**



# **Bending/curving**

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.




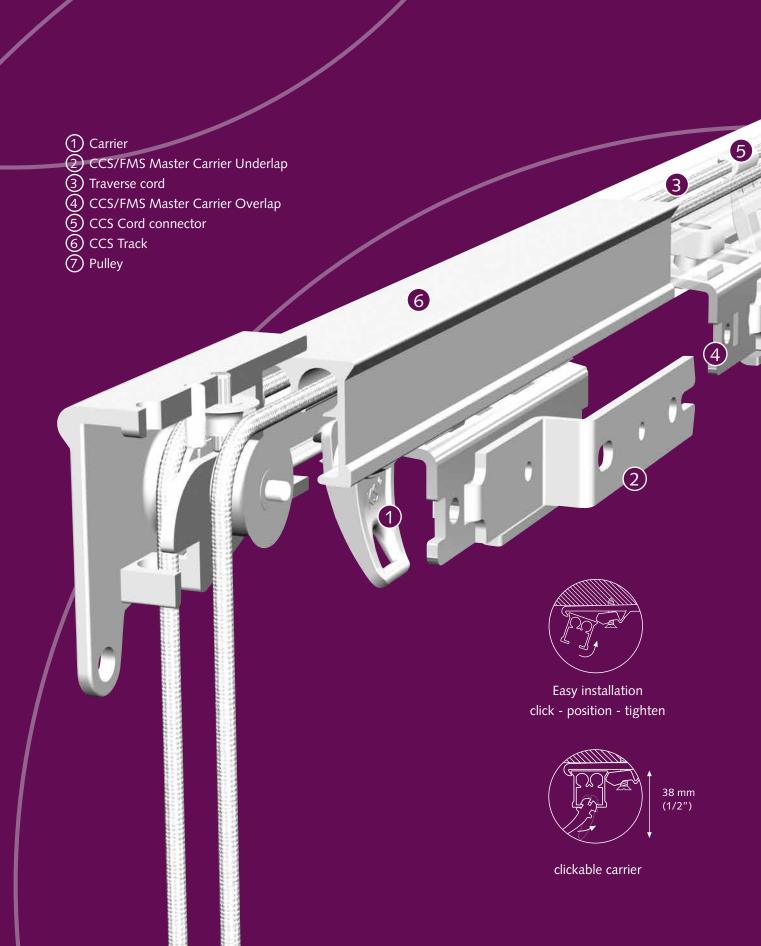


**Mounting Brackets** 

### Aluminium Wall Bracket single

A) 7,5 cm (3"): *B)* 6,3 cm (2") A) 10 cm (4"): *B)* 8,8 cm (3")



### Ceiling bracket




A) Min. 20 cm (8")




### Aluminium Wall Bracket double

A) 15 cm (6"): B) 9,2 cm (3"), C) 4,5 cm (2") A) 20 cm (8"): B) 9,2 cm (3"), C) 9,5 cm (4")



### Aluminium Wall Bracket triple 25 cm (10")



Brackets need to placed every 60 cm (24").

Colours available from stock:

Complete the art.nr. with the indicated colour-code

01 White, 03 Silver, 05 Brown, 06 Black

Other colours can be delivered on request.



**CCS Track** 

30010....cm Extruded aluminium chromated, 10/bundle powder coated. Factory lubricated for wall or ceiling mounting. Inches 3.66 m. (12'), 4.27 m. (14'), 4.88 m. (16'), 6.10 m. (20'). Colours: 01, 03.



CS/CCS/FMS CARRIER SMALL

Contract click carrier patented, clickable. UV-resistant POM plastic. 25101.. 000 250/box

Colours: 01, 02, 03, 05, 06.



CS/CCS/FMS CARRIER SMALL 2510100000 TRANSPARENT PE 250/box

Contract click carrier, patented, clickable Made of PE plastic to reduce noise, lightweight curtains only.



**Silence Carrier** 

Reduces resonance in the CCS track, for light weight curtains.

2510301000 250/box

Colours: 01



FMS/CCS/MRS Wheel Carrier

The wheel carrier goes smoothly over a splice.

5210101002 100/box

25184 000

3015601000

3016001000

3030301000

100/box

25/box

15/box

15/box

10/box



**CS/CCS/FMS Track Joiner** 

Used to make a solid connection between two pieces of track.

Colours 01, 05, 06



CCS Cord Master Carrier R/L Underlap

Multifunctional - reversible arm - will go through curves. Colours: 01, 03.

CCS Cord Master Carrier R/L 3015701000



Overlap 15/box Multifunctional - reversible arm - will go

through curves, will also fit stiffeners and cord connector. Colours: 01, 03.



**CCS/FMS Master Carrier R/L Underlap Single** 

Multifunctional - arm is reversible will slide trough curves. Colours: 01

**CCS Cord Connector** 

Colours: 01, 03, 05, 06.

Connects cord to the CCS master carrier.

30301.. 000

Colours: 01, 03, 05.



**End Pulley Small** 

Reversible, for non-stacking side on one way draw.

Colours: 01, 03, 05.



**Inside Wall Bracket** 

For additional support anywhere the pulley meets the wall.

3022301000 25/box

30302.. 000

25/hox



Straight Return R/L

Adjustable from 7,5 cm (3")

to 25 cm (10").

3022501000 10/box

10304..000

250 mtr/roll

1030501000

3030601000

3645702000

10182 000

1018201001

10192..000

1018601000

30/box

100/box

100/box

25/box

20/box

25/box



**Traverse Cord** 

Nylon drapery cord designed for strong smooth slide, Ø 3.5 mm (0,14"),16 ply.

Colours: 01, 03, 06.

**Tension Pulley** 

Metal.

Colours: 01

**Cord Weight** 

Plastic.

Colours: 01.

Plastic.

**Cord Safety Clip** 

Colours: 01.



**Smart Klick Ceiling Bracket** 

"Klicks" onto track, powder coated. Install with VK screw 4 mm. Inclusive Covercap

Colours: 01, 03, 05, 06.

**Covercap for Smart Klick** Ceiling Bracket

Fits on Smart Klick Wall and Ceiling bracket.

Colours: 01, 03, 05, 06.

Smart Klick Double Ceiling Bracket Large Distance between

two tracks: 90 mm (3,5")

**Smart Klick Double** 1018611000 **Ceiling Bracket Short** 30/box Distance between two tracks: 45 mm (1,8")



False Ceiling Bracket (metal)

For installation on to a suspended ceiling. The track can be fixed in any angle.

100/box 4519001000



**FSS Mounting Bracket** 

For concealed installation or ceiling installation in narrow spaces. Heavy Duty.

100/box 7160001000



	<b>Aluminium Wall Bracket</b> Smart klick, powder coated.		10203cm			
		7,5 cm single 10 cm single 15 cm double 20 cm double 25 cm triple	(3") (4") (6") (8") (10")	20/box 20/box 15/box 15/box 10/box		
	Colours: 01	1, 03.				

Contract Bending tool For CS/CCS/FMS/CRS/MTS	2560000000 1/each
CS/CCS/FMS Bending Wheel	2561000000 1/each

CCS Bending Strips	85000000002
For CCS track, length: 90 cm (35,4")	1/set
For CCS electric powered bender. Length 7 meter (23').	8500000010 1/each
	For CCS electric powered bender.



2560800000 1/each



**Electric Powered Bender** 1060500000 Available in 230V or 115V, to create 1/box continuous curves and arches. Minimum radius 50 cm (20").

Bending Wheels	2560700000
For Electric Powered Bender. Complete set of 3 wheels.	1/set



**Electric Powered Railcutter** 1061100000 230 Volt EU

1061200000 **Replacement Blade** For electric powered railcutter. 1/each

Distributor:



