

FOREST SHUTTLE® Series

The Forest Shuttle[®] curtain motor and the Forest Motorised curtain track System (FMS[®]) make an unbeatable combination when it comes to a troublefree operated electric curtains.

FOREST SHUTTLE® S FOREST SHUTTLE® M FOREST SHUTTLE® L FOREST SHUTTLE® AC FOREST SHUTTLE® iOn FOREST FMS® FOREST FMS® Plus FOREST FMS® Plus Recess

THE WORLD BEHIND YOUR CURTAINS

FOREST SHUTTLE® Series



When it comes to comfort, the Forest Shuttle[®] lives up to its expectations. Being able to open and close your drapes remotely, from the comfort of your chair, when you are on holiday, automatically at pre-programmed opening and closing times or even linked to variable sunrise and sunset times. The Forest Shuttle[®] is the silent force behind the opening and closing of draperies all over the world.

The Shuttle[®] can be fully integrated in all major home automation systems.

For maximal safety, integrated emergency control ensures manual operation of the drapery in case of power failure.

The smooth and silent running curtain track system can, in addition to remote operation, also be operated by hand. Thanks to Touch Control technology, a gentle pull on the curtain is enough to activate the motor.

COLOUR OPTIONS SHUTTLE® L



PRODUCT INFORMATION

The Forest Shuttle[®] family of motors offer the following functions:

- High quality, extremely reliable and ultra silent motor.
- Integrated RF multi receiver, for Diamond Sense Remote control or wall switch.
- Various control options: App control, Remote Control (RF), Wall Switch Domotics, Building/Hotel Automation, Serial Communication, Z-Wave etc.
- Full automatic setting of the limits.
- Programming of intermediate positions possible.
- Touch Control Technology, gently pulling the curtain by hand will activate the motor. Sensitivity adjustable¹.
- Integrated Emergency Control with automatic declutch in case of power failure, to ensure a manual operation of the curtains.
- Stack-back position programmable to every desired setting;
- Can be used in combination with various motorised track systems like Forest Motorised Track System (standard option), Motorised Design System (DS-XL LED) and Motorised Rod System (MRS).
- Can be mounted on the left or the rigth side of the track.
- Can be used with curved Forest motorised track systems.
- Integrated Z-Wave Plus as option (only Shuttle[®] S/M/L).
- For Skylight System (FSS®) a special Shuttle® M motor with receiver and fixed drive is available.
- Tandem motor application possible as well.
- Upside down inverted motor mounting available.
- Variable velocity with slow start and slow stop.
- Choose which Forest Shuttle motor best suits your application and integration needs.
- Warranty: 10 years on motor (2 years on battery pack iOn)



FOREST SHUTTLE® SERIES

The Forest Shuttle[®] is offered in 5 versions:



DECORATIVE TRACK OPTIONS

All Forest Shuttle[®] motors are applicable on the FMS[®] track system. More decorative options are also available: DS-XL[®] LED motorised and the Motorised Rod System (MRS[®]).



SHUTTLE DEMO SUITCASE

We have developed a special demo case for the Forest Shuttle[®]. In this case you will find a sample of the motorised Forest Shuttle[®] L system.

The case also contains examples of the motorised FMS Plus[®] track, a 'Forest Diamond Sense' remote control, a multiwireless wall transmitter and the Wi-Fi Dongle. All other accessories and documentation are of course included.



FOREST SHUTTLE® iOn



Our bestselling Forest Shuttle[®] system is now also available in a wireless, battery powered version. The Shuttle[®] iOn is perfect for areas without nearby power points.

An extensive period of research, development and endurance testing on countless of track set-ups has resulted in the Forest Shuttle® iOn. The Shuttle® iOn's motor is fitted with an internal, removable heavy duty battery pack. Depending on the track size and curtain weight, the battery only needs to be charged 2 to 3 times per year.

You can expect the same unique functionalities as that of the wired Shuttle[®] L, like Touch Control technology. The motor has an integrated Multi RF receiver, allowing for operation using any Forest remote control option.

Unique in the market

The Shuttle[®] iOn can be used in combination with curved tracks, which is unique in the market. It fits all Forest motorised track systems, like the FMS[®] system, FMS[®] Plus recess system, MRS[®] motorised rod system and also the DS[®]-XL motorised track systems.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms or anywhere a wireless motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Li-ion rechargeable battery pack;
- Suitable for curtains up to 25 kg and 8 meter track length (straight track);
- Suitable for bended/curved curtain tracks with up to 2 bends in, for example, bay windows;
- A single full charge will last up to 6 months;
- Available colours: white, black.



FOREST SHUTTLE® Control Options

Our wide range of controls make finding a fit for your home even easier; controlling the curtains by hand, remote or even by building automation system. With the remote you can control the curtains in any position you like. When controlling the motorised curtain system by your smartphone or tablet, you can create and schedule customized room scenes that allow your curtains to operate on their own throughout the day.



FOREST DIAMOND SENSE REMOTE

15 or 2 Channel Remote control. Control up to 15 systems individually and in group by integrated timer function or manual. Auto-On mode, when holding hand above it, the integrated LED light will automatically come on. Radio control, range up to 30 meters. Including magnetic wall support.



FOREST WI-FI DONGLE

With the Shuttle[®] Wi-Fi dongle, you can control your motorised curtains on your mobile device by the Forest Connect app or even by voice command with the easy integration in for example Google Home, Amazon Echo or Apple Siri without the need for an additional hub or gateway.



FOREST WIRELESS CONNECTOR


The Forest Wireless Connector is an easy way to make the motorised curtain systems 'smart'. This wireless remote solution works in combination with an analogue timer or a smart plug with which services as Apple HomeKit or Google Assistant or Amazon Alexa become available. It is also easily incorporated into most popular building management systems, including dry contact controls.



BUILDING AUTOMATION / HOTEL CONTROL

The Forest Shuttle[®] can be connected to any Building Automation system, by relay control.

SMART DEVICE CONNECTIVITY

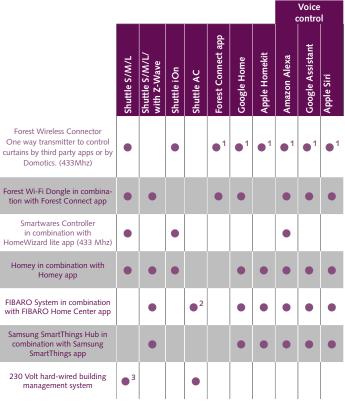

In combination with a smart plug
 Only with FIBARO Roller Shutter 3 / Walli Roller Shutter
 In combination with an AC Control Set

WORKS WITH



www.amx.com





www.z-wave.com

CRESTRON.

www.crestron.com



Forest Shuttle $^{\odot}$ is compatible with many other Building Automation systems, thanks to its modular construction. A competitive advantage over other motorised drapery systems in the world!

FOREST SHUTTLE® Technical information



SHUTTLE® S

24V DC Internal External, 100 - 240V AC -0,8A - 50 - 60Hz; Output 24V DC - 2,5A 40W 1.0 Nm 14-17cm/s < 40 dB(A) Max. curtain weight (without curves) 40 kg 7 x 5 x 20 cm

SHUTTLE® M

24V DC Internal, optional External, 100-240V AC -1,5A - 50-60Hz; Output 24V DC - 2,7A 65W 1.5 Nm 14-17 cm/s < 40 dB(A) 70 kg 7 x 5 x 23 cm

SHUTTLE[®] L

100 - 240V~ 50 - 60Hz 0.8A Internal Internal

```
40W
1.0 Nm
14-17cm/s
< 40 dB(A)
40 kg
7 x 5 x 28 cm
                   tion)
                    ed)
```

SPECIFICATIONS

Voltage Shuttle

Power Supply

Max. power Torque:

Noise Level:

Dimensions Motor:

Speed:

RF Multi Receiver

| Net. Weight Motor | 700 gr. | 930 gr. | 930 gr. |
|-------------------------------|----------------------------|----------------------------|-----------------------------|
| Dimensions Power Supply | 50 x 80 x 30 mm | 50 x 110 x 30 mm | - |
| Protection degree | IP20 | IP20 | IP20 |
| Max. running time | 240 sec (in one direction) | 240 sec (in one direction) | 240 sec (in one direction |
| Colour options | White / Black | White / Black | White / Silver / Black |
| Certification & Marking: | CE/FCC | CE/FCC | CE/FCC |
| | | | |
| Touch Control technology | \checkmark | \checkmark | \checkmark |
| Integrated Emergency control | \checkmark | \checkmark | \checkmark |
| RF Communication Standard | \checkmark | \checkmark | \checkmark |
| Z-Wave communication | \checkmark | \checkmark | V |
| Automation System compatible | \checkmark | \checkmark | \checkmark |
| Wi-Fi compatible | \checkmark | \checkmark | \checkmark |
| Works with DS-XL LED Dimmer | \checkmark | \checkmark | (additional adaptor needed) |
| Works with Wireless Connector | √ | V | \checkmark |
| Can be used with curved track | V | \checkmark | \checkmark |
| Plug & Play | \checkmark | \checkmark | \checkmark |
| Warranty | 10 Years | 10 Years | 10 Years |
| | | | |



SHUTTLE[®] AC

100 - 240V~ 50 - 60Hz 0.8A Internal Home Automation 230V

| Max. power | 40W |
|--------------------------------------|-----------------------------------|
| Torque: | 1.0 Nm |
| Speed: | 14-17cm/s |
| Noise Level: | < 41 dB(A) |
| Max. curtain weight (without curves) | 40 kg |
| Dimensions Motor: | 7 x 5 x 28 cm |
| Net. Weight Motor | 980 gr. |
| Dimensions Power Supply | - |
| Protection degree | IP20 |
| Max. running time | 240 sec (in one direction) |
| Colour options | White |
| Certification & Marking: | CE |
| | |
| Touch Control technology | · |
| Integrated Emergency control | √ |
| RF Communication Standard | \checkmark |
| Z-Wave communication | - / 7 / / |
| Automation System compatible | V |
| Wi-Fi compatible | |
| Works with DS-XL LED Dimmer | $\langle \langle \rangle \rangle$ |
| Works with Wireless Connector | -/ / |
| Can be used with curved track | \checkmark |
| | |

10 Years

14.8V DC Internal Charger Input 100 - 240~, 50-60Hz, 2.0A Charger Output 16,8Vdc 1000mA Removeable Battery Pack 30W 1.0 Nm 14-17cm/s <40 dB(A) 25 kg 7 x 5 x 32 cm 1160 gr. -IP20 150 sec (in one direction) White / Black CE V $\sqrt{}$ √ ν $\sqrt{}$ (additional adaptor needed) V V V

SPECIFICATIONS

Voltage Shuttle

Power Supply

RF Multi Receiver

Plug & Play

Warranty

10 Years on motor, 2 years on battery pack

FOREST MOTORISED TRACK SYSTEM - FMS®



The Forest Shuttle[®] and the Forest motorised curtain track system (FMS[®]) make an unbeatable combination when it comes to noiseless operated curtains.

The FMS[®] System is an elegant system for all types of medium and heavyweight draperies. Available length up to 14 meter in 3 colours: timeless white and in a stylish black or blizzering silver finish, making it suitable to fit in every design.

FMS[®] PLUS AND RECESS FIXATION

Instead of a regular ceiling fix or wall fix installation of the FMS® track system, Forest Group also offers a solution for recess fixed motorised curtain track. The FMS® Plus system is ideal for a clean, concealed curtain track installation. The recess profile can be fitted during the construction of the ceiling, the FMS® Plus motorised track can then be fitted once all the finishing works have been completed. The motor can be placed in a regular position, or upside down into the ceiling. The system can be fitted with the regular FMS® carriers, rotating carriers or the Forest Wave System for wave pleat.

FOR USE IN

Hotels, offices, residences, boats and yachts, showrooms, business meeting rooms, conference centers or anywhere a silent motorised track system is required for curtains and drapes.

PRODUCT INFORMATION

- Compact and noiseless operated motorised track system
- All Shuttle[®] motors can be used on the FMS[®] System;
- Available in white, silver and black;
- Components in matching colours;
- Clickable off-set carriers for a straight heading of the curtain; rolling carriers and Easyflex carriers also available;
- Especially designed for use in combination with Forest Wave System;
- Motor can be mounted on the left or the rigth of the track.
- One-way draw or center (split) draw curtains possible;
- All KS[®] bracket compatible;
- Ceiling brackets and wall brackets available;
- FMS[®] track can be made in lengths of up to 14 meter;
- FMS[®] track can be curved/bended;
- Recess fixation possible by recess profile in combination with FMS[®] Plus track.
- Warranty: 10 years

FOREST WAVE PLEAT SYSTEM

Opt for a regular pleated heading or choose for a more atmospheric effect for the wavepleat system; Forest Easyfold Series. The FMS® system has been designed for use with the Forest Easyfold Series. Our wave system is designed so that the curtains maintain their folding effect from the moment they are dressed.

For more information about our wave pleat system and basic components please refer to our Easyfold Series brochure.

PROFILE

FMS® Track

- Weight 303 gr/mtr.
- Size 20 x 20 mm
- Aluminium extrusion
- Colours available: white, silver & black

FMS[®] Plus Track

- Weight 500 gr/mtr.
- Size 19,6 x 30 mm
- Aluminium extrusion
- Colours available: white & black


FMS® Plus Recess Profile

- Weight 555 gr/mtr.
- Size 26 x 32,20 mm
- Aluminium extrusion

BENDING / CURVING

• Colours available: white & black

The FMS[®] track and FMS[®] Plus track (except recess profile) can be bended and reversed bended with a radius of 20 cm (8"). Continuous curving can be done with the Electric



26 mm

20 mr



FOREST FMS® TRACKS

The FMS® track system is in three versions available:



RECESS PROFILE WITH FMS® PLUS TRACK

Powered Bender. 20 cm Min. radius 50 cm (19,69") Min. radius 50 cm (19,69") (1) Shuttle® Motor (2) Shuttle® Motor (3) Shuttle® Motor (4) Shuttle® Motor (3) Shuttle® Motor (4) Shuttle® Motor (3) Shuttle® Motor (4) Shuttle® Motor (5) Shuttle® Motor (6) Shuttle® Motor (6) Shuttle® Motor (7) Shuttle® Motor (7) Shuttle® Motor (8) Shuttle® Motor (9) Sh

| FMS | FMS PLUS | MOTOR & CONTROL OPTIONS | ARTICLE | PACKING UNIT | | | ART.NR |
|-----|----------|-------------------------------|--|-----------------|--|--|--|
| • | • | | SHUTTLE L Motor with internal RF Receiver, Touch Control and Emergency Control. 100 - 240V 50 - 60Hz 0.8A Power supply Dimensions 7 x 5 x 23 cm Up to 45 kg curtain weight | 1/box | 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V 100-240V | white int. multi receiver white int. Z-Wave receiver white int. Z-Wave rec. ANZ white int. Z-Wave rec. India silver int. multi receiver black int. multi receiver | 5232000001 5232000002 5232000007 5232000069 5232003001 5232006001 |
| • | • | | POWER CABLE FOR SHUTTLE L & S | 1/box | EU 1.00 mtr EU 4.00 mtr UK 4.00 mtr USA 2.00 mtr AUS 1.80 mtr EU 4.00 mtr | white white white white white black | 5201001101 5201001104 5201001134 5201001121 5201001141 5201006104 |
| • | • | Ĩ | SHUTTLE M Strongest motor with internal RF Receiver, Touch Control System and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 75 kg curtain weight | 1/box | 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC 24 Volt DC | white int. multi receiver white int. Z-Wave receiver EU white int. Z-Wave US/908/Mhz black int. multi receiver | 5232000003 5232000004 5232000006 5232006003 |
| | | • | SHUTTLE M FOR SKYLIGHT SYSTEM (FSS) Motor with fixed drive | 1/box | 24 Volt DC | white int. multi receiver | 7131000000 |
| • | • | | ADAPTOR SET SHUTTLE M Incl. cable and holder | 1/box | EU 0.50 mtr EU 3.00 mtr UK 0.50 mtr USA 0.50 mtr EU 0.50 mtr | white white white white black | 5201002002 5201002003 5201002004 5201002007 5201006002 |
| • | • | Ĩ | SHUTTLE S Motor with internal RF Receiver, Touch Control and Emergency Control. 24 V Power supply 100-240 V adaptor set to be ordered separately. Dimensions 7 x 5 x 20 cm Up to 40 kg curtain weight | 1/box | 24 Volt DC | white int. multi receiver black | 5232000000 5232006000 |
| • | • | | ADAPTOR SET SHUTTLE S Incl. holder / excl. cable | 1/box | 24 Volt | white | 5232003002 |
| • | • | | SHUTTLE AC Motor with internal RF Receiverl and Emergency Con- trol. Only for Building Management System. 100 - 240V 50 - 60Hz 0.8A Power supply Up to 40 kg curtain weight | 1/box | 100-240V | white | 5233000000 |
| • | • | | SHUTTLE ION Incl. Battery Pack (14.4 V DC) Dimensions 7 x 5 x 32 cm Up to 25 kg curtain weight | 1/box | Accu Pack | white black | 5234000000 5234006000 |
| • | • | | SHUTTLE ION BATTERY PACK 4-Cell Lithium iOn Capacity 3400mAh | 1/box | | white black | 5234000001 5234006001 |
| • | • | | SHUTTLE ION CHARGER CABLE 1.20 mtr cable | 1/box | EU UK USA AUS | black black black black | 5234000002 5234000003 5234000004 5234000005 |
| • | • | e S | DC EXTENSION CABLE FOR 24V ADAPTOR For use with Shuttle S/M adaptor and dimmer DS-XL LED | 1/box | 2 mtr | white | 5209002200 |
| • | • | | AC CONTROL SET Use the AC Control in combination with the Shuttle Motor for Live AC AC Control set complete Secondairy unit-potential free relay Secondairy unit-potential free relay | 1/box | 220 Volt 200V-240V 100V-120V | white white white US | 5201002202 5201002200 5201002203 |

| FMS | FMS PLUS | MOTOR & CONTROL OPTIONS | ARTICLE | PACKING UNIT | | | ART.NR |
|-----|----------|-------------------------------|---|-----------------|--|----------------------|--|
| • | • | Read and a second | FOREST DIAMOND SENSE REMOTE CONTROL | 1/box | Works with all Shuttle motors | white black | 5201091470 5201096470 |
| • | • | | FOREST WIRELESS CONNECTOR Incl. 15 cm USB cable / excl USB charger One way transmitter to control curtains by third party Apps* (i.e. Google / Apple / Amazon) or by Domotics. *always in combination with smart plug | 1/box | Works with all Shuttle motors | white | 5201002270 |
| • | • | Ŷ | FOREST WIRELESS CONNECTOR USB CHARGER | 1/box | | EU UK AU US | 5201002271-EU 5201002271-UK 5201002272-AU 5201002274-US |
| • | • | | FOREST WIFI DONGLE Incl. cable WiFi 2.4GHz Power supply 12V DC 300mA max USB power 5V DC 1000mA max Control the curtains by Forest Connect App Easy integration third party apps by Google / Amazon Bi-directional | 1/box | Works with all Shuttle motors except AC and iOn | white black | 5201002280 5201006280 |
| • | • | 0 | FOREST SHUTTLE TWILIGHT SENSOR (KAKU) | 1/box | Works with all Shuttle motors (besides Shutt- le iOn) | white | 5201001951 |
| • | • | | FOREST WIRELESS WALL SWITCH 2-channel wall switch Dimensions: 8.5 x 8.5 x 1 cm | 1/box | Works with all Shuttle motors | white black | 5201001480 5201006480 |
| • | • | | FOREST PULSE WALL SWITCH Can operate one motor only Dimensions: 6.5 x 5.5 x 2.7cm (2.56 x 2.17 x 1.06") | 1/box | | white | 5201001900 |
| • | • | | FOREST SHUTTLE DEMO SUITCASE METAL | Piece | | | 9903000000 |

| | FMS PLUS | FMS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|---|---|--------------|-----------------------------------|--|
| FMS | FMS | | | | | |
| • | | | FMS TRACK 5.80 mtr (19') 7.00 mtr (23') 7.00 mtr (23') 7.00 mtr (23') | 10/bundle | white white silver black | 5101001580 5101001700 5101003700 5101006700 |
| • | | | FMS CARRIER Klickable, offset, made of UV-resistant plastic. 10 Carriers on a breakaway strip, can be clicked into the the track after installation. | 250/box | white silver black | 2510101000 2510103000 2510106000 |
| • | | | ECONOMY SLIDE Can turn in the track | 500/box | white black | 2510610000 2510606000 |
| • | | | FMS MASTER CARRIER UNDERLAP CLICK ON Reversible for Click on stiffner | 15/box | white silver black | 5215801010 5215803010 5215806010 |
| • | | | FMS MASTER CARRIER OVERLAP CLICK ON | 15/box | white silver black | 5215901010 5215903010 5215906010 |
| • | | 1 2 1 2 1 0 0 0 0 0 | UNDERLAP SINGLE R/L | 15/box | white black | 3016001000 3016006000 |
| • | | (2 ° ° ° °) | PROLONGED OVERLAP CLICK ON 150 mm long 200 mm long | 15/box | white black white black | 9500001010 9500006010 9500001020 |
| • | | | Z-SHAPED OVERLAP ARM Reversible Z-shaped overlap arm. Fits FMS master carriers. For further reducing of light leakage for center closing. | 15/box | white | 9500001030 |
| • | | | STIFFENER CLICK-ON Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain | 15/box | | 5116001001 |
| • | | 10000000000000000000000000000000000000 | FMS TRANSPORT BELT Toothed belt, to be installed inside the FMS Track | 100mtr/roll | | 5105501000 |
| • | | FF | FMS CONNECTOR To fix the FMS Master Carrier onto the FMS transport belt | 50/box | white silver black | 5103011500 5103013500 5103016500 |
| • | | | FMS MOTOR PULLEY Connects motor with FMS Track | 1/box | white silver black | 5103011000 5103013000 5103016000 |
| | | | FMS MOTOR PULLEY UPSIDE DOWN | 1/box | white | 5103011003 |
| • | | | FMS ANGLE PULLEY 45 degrees adjustable Only for up to 7kg curtain weight (Shuttle M) | 1/box | white | 5103011010 |
| • | | | FMS RETURN PULLEY WITH SNAP Reverses the FMS transport belt in the FMS track | 1/box | white silver black | 5103011100 5103013100 5103016100 |
| • | | | FMS TRACK JOINER Used to make a solid connection between two pieces of track | 10/box | white silver black | 2518401000 2518403000 2518406000 |

| WAVE EASYFLEX | WAVE EASYSNAP | WAVE COMPONENTS (FES) | ARTICLE | PACKING UNIT | | ART.NR |
|------------------|------------------|--|--|--------------|--------------------------|--|
| • | | alalala la | WAVE ADJUSTABLE MASTER CARRIER UNDERLAP | 25/box | white black | 4813001050 4813006050 |
| • | | | WAVE BELT CONNECTOR CENTER DRAW To use in combination with adjustable wave carrier | 50/box | white black | 4813001040 4813006040 |
| • | | | WAVE BELT CONNECTOR ONE-WAY DRAW To use in combination with adjustable wave carrier | 50/box | white black | 4813001030 4813006030 |
| • | | | WAVE RETURN PULLEY MOTORISED To use in combination with adjustable wave carrier | 25/box | white black | 4813001060 4813006060 |
| • | | $\overline{\bigcirc}$ | WAVE DS-XL END STOP To use in combination with adjustable wave carrier For center draw curtains | 100/box | | 3916001000 |
| • | | | FMS RETURN PULLEY EASYFLEX Single | 1/box | white silver black | 5103011102 5103013102 5103016102 |
| • | | | WAVE ADJUSTABLE HOOK MOTOR | 25/box | white black | 4813001010 4813006010 |
| • | | | WAVE ADJUSTABLE HOOK RETURN PULLEY | 25/box | white black | 4813001020 4813006020 |
| • | | | EASYFLEX MASTER CARRIER LEFT 90 degrees | 15/box | white silver black | 4815301090 4815303090 4815306090 |
| • | | | EASYFLEX MASTER CARRIER RIGHT 90 degrees | 15/box | white silver black | 4815401090 4815403090 4815406090 |
| | • | | EASYSNAP MASTER CARRIER LEFT 90 degrees | 15/box | white | 4815301090 |
| | • | | EASYSNAP MASTER CARRIER RIGHT 90 degrees | 15/box | white | 4815401090 |
| | • | | EASYSNAP FMS MASTER CARRIER | 15/box | white | 4815401000 |
| | • | | EASYSNAP FMS UNDERLAP L/R | 15/box | white | 4815401000 |
| • | • | | WAVE STIFFENER CLICK ON 'SMALL' Recommended to attach to the FMS master carriers, stiffner to be stitched into the curtain | 15/box | white | 4815001001 |

| | FMS PLUS | FMS PLUS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|--------------------------------|--|--------------|----------------|--------------------------|
| FMS | FMS | | | | | |
| | • | | FMS PLUS TRACK 7.00 mtr (23') | 10/bundle | white black | 5131001700 5131006700 |
| | • | | FMS PLUS RECESS PROFILE 7.00 mtr (23') | 1/piece | white black | 5131011100 5131016700 |
| | • | | FMS PLUS RECESS PROFILE FIXING STRIP 7.00 mtr (23') length | 1 piece | white black | 5131001600 5131006600 |
| | • | | FMS PLUS RECESS FIXING WEDGE To fix the track into the recess profile | 10/box | white black | 5131001100 5131006100 |
| | • | | FMS PLUS RECESS CORNER TRACK Preshaped 90 degrees curve for FMS PLUS track | 1/piece | white | 5131011790 |
| | • | | ECONOMY CARRIER Can turn in the track | 100/box | white black | 2510601000 2510606000 |
| | • | | FMS PLUS MASTER CARRIER UNDERLAP Arm is reversible, incl. belt connector For use in combination with FES-system (Easyflex) | 10/box | white black | 5135801000 5135806000 |
| | • | 2°°° C | FMS PLUS MASTER CARRIER OVERLAP Arm is reversible, incl. belt connector For use in combination with FES-system (Easyflex) | 10/box | white black | 5135901000 5135906000 |
| | • | | FMS PLUS MASTER CARRIER EASYFLEX L&R 90 degrees For use in combination with FES-system (Easyflex) | 10/box | white | 5135901010 |
| | • | | FMS PLUS TRANSPORT BELT Toothed belt to be installed inside FMS Plus track 9.3 x 2.2mm KEVLAR | 100mtr/roll | | 5135501001 |
| | • | | FMS PLUS MOTOR PULLEY Reverse the FMS PLUS belt in the FMS PLUS track | 1/box | white black | 5133011000 5133016000 |
| | • | | FMS PLUS RETURN PULLEY Reverse the FMS PLUS belt in the FMS PLUS track | 100mtr/roll | white black | 5133011100 5133016100 |
| | • | | FMS PLUS MOTOR PULLEY UPSIDE DOWN Can be used to place the motor upside down (recess) | 1/box | white | 5133011003 |

| FMS | FMS PLUS | FMS PLUS TRACK + COMPONENTS | ARTICLE | PACKING UNIT | | ART.NR |
|-----|----------|--------------------------------|--|--------------|----------------------------------|--|
| | • | | FMS PLUS L-PULLEY To create a double overlapping track system in combi- nation with only one motor | 1/box | white | 5133011101 |
| | • | | FMS PLUS RECESS COVER PLATE | 1/box | white black | 5133011104 5133016104 |
| | • | | FMS PLUS RECESS COVER PLATE UPSIDE DOWN Cover plate for recess; motor pulley | 1/box | white black | 5133011004 5133016004 |
| | • | | FMS PLUS BRIDGE 6,5 cm 28 cm | 10/box | white black white black | 4518701000 4518706000 4518601000 4518606000 |
| | • | (0 | FMS PLUS TRACK CONNECTOR PIN Stainless steel, 2 x 20mm For a firm seamless connection | 50/box | | 990000012 |

| FMS | FMS PLUS | MOUNTING OPTIONS + OTHER ITEMS | ARTICLE | PACKING UNIT | | ART. NR |
|-----|----------|--------------------------------------|--|-----------------|--------------------------|--|
| • | • | | SMART KLICK CEILING BRACKET Incl. cover cap 'Klicks' onto track, powder coated | 100/box | white silver black | 1018201001 1018203001 1018206001 |
| | | | ALUMINIUM WALL BRACKET 7.5 cm single (3') | 20/box | white silver black | 1020301075 1020303075 1020306075 |
| | | | ALUMINIUM WALL BRACKET 10 cm single (4') | 20/box | white silver black | 1020301100 1020303100 1020306100 |
| • | • | | ALUMINIUM WALL BRACKET 15 cm double (6') | 15/box | white silver black | 1020301150 1020303150 1020306150 |
| | | | ALUMINIUM WALL BRACKET 20 cm double (8') | 15/box | white silver black | 1020301200 1020303300 1020306300 |
| | | | ALUMINIUM WALL BRACKET 25 cm triple (10') | 15/box | white silver black | 1020301250 1020303250 1020306250 |
| • | • | | SMART KLICK COVER CAP ALU WALL BRACKET UNIVERSAL | 50/box | white silver black | 1021301000 1021303000 1021306000 |
| • | • | • | FSS MOUNTING BRACKET For concealed installation or ceiling installation in narrow spaces. Heavy Duty. | 100/box | | 7160001000 |

| FMS | FMS PLUS | BENDING COMPONENTS + OTHER ITEMS | ARTICLE | PACKING UNIT | | ART. NR |
|-----|----------|--|---|-----------------|------------------|--------------------------|
| • | • | | CONTRACT BENDING TOOL BASIC for FMS and FMS Plus | 1/each | | 256000000 |
| • | | (0) | FMS CONTRACT BENDING WHEEL radius 20 cm incl. wedges | 1/each | | 2561000000 |
| | • | | FMS PLUS CONTRACT BENDING WHEEL ALL-IN radius 20 cm incl. wedges and bending strips | 1/each | | 456000000 |
| • | | | FMS BENDING STRIPS 90 cm T-bending strip | 1/each | | 5160100000 |
| | • | | FMS PLUS SET BENDING STRIPS 90 cm | 1/each | | 4560100000 |
| • | • | | ELECTRIC POWERED BENDER | 1/each | 230V 110/115V | 1060500000 1060500001 |
| • | | | FMS BENDING WHEEL for electric bender set of 3 | 1/set | | 2560700000 |
| • | | | FMS BENDING STRIPS for electric bender 7 mtr | 1/each | | 5160600000 |
| | • | | FMS PLUS BENDING WHEEL SET ALL-IN for electric bender Incl. bending strips | 1/set | | 5131000000 |
| | • | | FMS PLUS BENDING STRIPS for electric bender | 1/piece | | 5131000001 |
| • | • | | FOREST LUBRICANT To lubricate components during assembly | 1/box | | 5109010000 |



Download Forest Connect app

Forest Group The Netherlands +31 (0) 570 622850 www.forestgroup.com info@forestgroup.com

FOREST[®]

PRODUCT BROCHURES - TECHNICAL SHEETS - REFERENCES - VIDEOS PRODUCT ADVISOR - MEASURE AND CHECK TOOL - EASYFLEX CALCULATION



